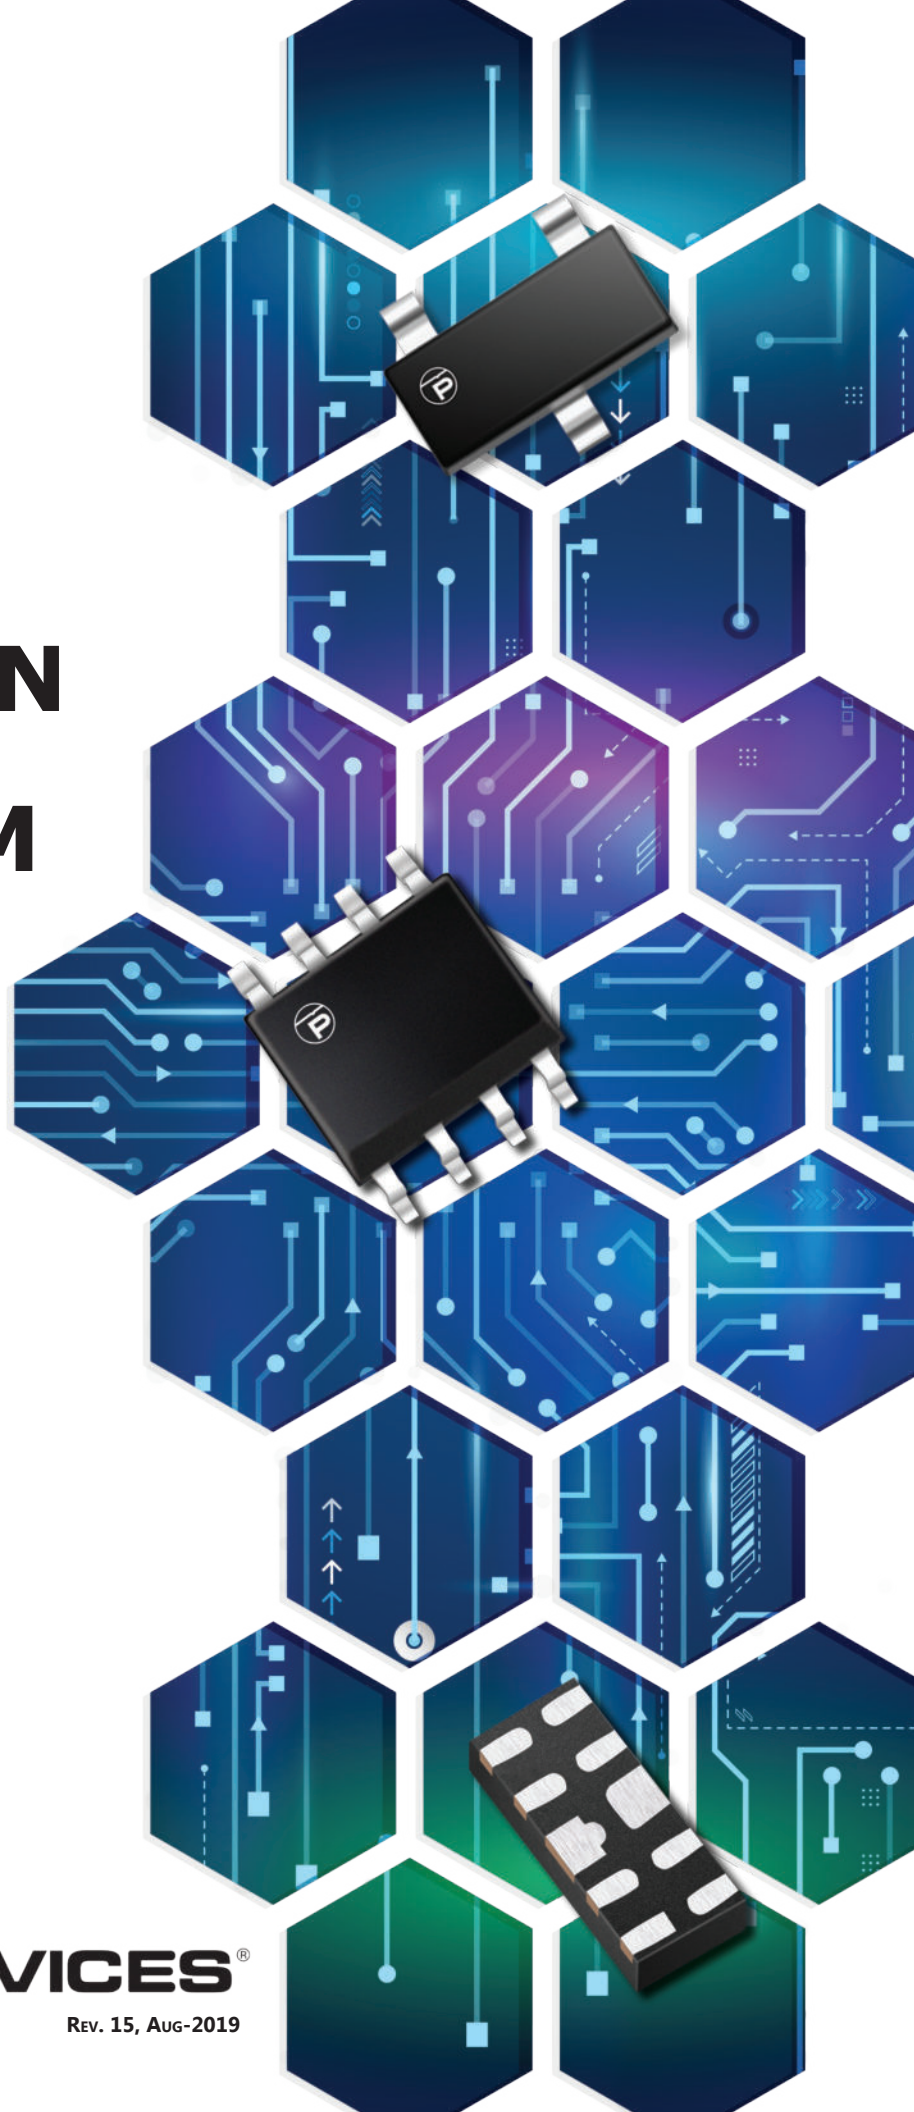
Circuit Protection Shortform Catalog



PROTEK DEVICES®

Rev. 15, Aug-2019

TABLE OF CONTENTS

Product Index – Alphanumeric 2
Unidirectional TVS Device Selection Process 5
Bidirectional TVS Device Selection Process 6
Solutions by Application 7
TVS Diode Arrays 11
Steering Diode/TVS Combo 37
Flip Chip Arrays 43
TVS Diode/Thyristor 43
Steering Diodes 44
EMI Filter/TVS Diode Arrays 48
Thyristors 49
Module – Components 50
Module – Surgebusters™ 54
Overcurrent Protection - Fuses 56
Overcurrent Protection – Polymer PTC Devices 58
Standards and Waveforms 59
DO-160G Waveforms 61
Product Packaging 63

ATTENTION

- Not all voltages, configurations or packages are shown. Please contact customer service for more information.
- ProTek offers protection devices for Automotive applications. The part numbers begin with the prefix 'PAM'.
- ProTek offers protection devices for LED applications. The part numbers begin with the prefix 'PLED'.
- All devices, with the exception of those contained within the Modules-Components and Modules-SurgeBuster sections are Lead-Free, ROHS compliant. These products are designated as "lead free" and meet the requirements of the European Union's restriction on the use of hazardous substances in electrical equipment as stated in (RoHS) direction, 2002/95/EC. ProTek Devices defines "lead free" as products that are compatible with current RoHS requirements for the 6 "banned" substances: Lead (Pb, <1000ppm), Cadmium (Cd, <100ppm), Mercury (Hg, <1000ppm), Hexavalent Chromium (Cr6+, <1000ppm), Poly Brominated Biphenyls (PPB, <1000ppm), Poly Brominated Diphenyl Ethers (PBDE, <1000ppm). This includes the requirements that lead not exceed 0.1% by weight in homogeneous materials.
- The following packages are REACH Compliant: Axial Leads, DFNs, DIPs, Flip Chips, MSOPs, QFNs, SCs, SODs, SOICs, SOTs and VSIPs
- Standard Tape & Reel Nomenclature
  - -T7 for 7" Reels, i.e., PSOT05-T7
    - –T71 for 7" Reels 1,000 pieces per reel, i.e., ESD4-LFC-T71
    - –T73 for 7" Reels 3,000 pieces per reel, i.e., ESD4-LFC-T73
  - -T13 for 13" Reels, i.e., SM8LC05-T13
  - -TS for sample size Reels, i.e., SM16LC05C-TS

Not all products are available in 7" or 13" reels. Quantities per reel vary depending upon package size. Please consult the product datasheet or customer service for ordering information regarding a specific part series. All datasheets can be found on ProTek Devices website: www.protekdevices.com

Do not put products into life support systems without written consent from ProTek Devices.

ALPHANUMERIC - INDEX

1.0SMBJxxA/CA Series 11
1.5KExxA/CA Series 50
1.5SMCxxA/CA Series 11
15KP Series 50
15KPA Series 50
232B & E 54
2700SM78CAN 50
30KPA Series 50
420E Series 54
420LB & LE Series 54
422B & E 54
422ELC 54
485ELC 54
5.0SMDJ Series 11
587B Series 54
587BLP Series 54
587BLPE Series 54
5KPxxA/CA Series 50
60 & 90KS200C 50
704 Series 50
CPxx/C Series 11
DA8 Series & DA16 Series 11
DALC112S1 44
DD3K Series 50
DFN6-36 12
DFN8-36 12
DL0521P 12
DLZ Series 12
DSL03-24 37
DSL03-24T 43
DSL70 44
DSOT0502 13
EBLCxxC Series 13
EM02-100 48
EM1631-08DSLP 48
EM4D/LP-100L 48
EM8D/LP/SLP-100L 48
EM8Q-100 48
ESD4-DFN 13
ESDA05C-5 13
ESOT12LCC-1 13
ESOT24LCC-2 13
ESOT3.3LC-2 13
ESOT3.3LCC 13
ET108 44
ET720 44
ET721 44
ET723 44
ET724 44
GBLCxx/C Series 14
GBLCxxCDN Series 14
GBLCxxCDSL Series 14
GBLCxxCIDFN Series 14
GBLC03CIDNHP 14
GBLC03CIHP 14
GBLCxx/CI Series 14
GBLCxxLC/CLC Series 14
GBLCSCxx/C Series 15
GBLCSC08CLC 15
GBLLC03/C Series 15
GPZ Series 51
GPZ1275B60K 51
IO6LC 44
K Series 51
LCA & LCD Series 15
MAD Series & MAD1108 45
MMAD Series & MMAD1108 45
MSMFxx/C Series 15
MSMF05LC & MSMF05LCC 15
P0201D05C 16
P0201V05 16
P0402FCxxC Series 43
P0402V Series 16
P0402VP24 16
P0404FCxxC Series 43
P0603V24 16
P15KP & P30KP Series 51
P5V0S1UL 16
P5V0S1ULC 16
P4SMAxxA/CA Series 17
P6KExxA/CA Series 51
P6SMBxxA/CA Series 17
PAM01SC7905C 17
PAM02SD23xx/C Series 17
PAM03SD23xxCI Series 17
PAM04DF100524 37
PAM04ST430502 37
PAM05SC700504F 37
PAM06SC7905S 17
PAM07DF23K24 51
PAM08SD23xx/C Series 17
PAM09SD2305HP 17
PAM1CAN 18
PAM1FLEX 18
PAM1IVN27 18
PAM1LIN 18
PAM2CAN 18
PAM2IVN24 18
PAM2LIN 18
PAM3CAN 18
PAM5SxxA Series 18
PAM6SxxA Series 19
PAM8SxxA Series 19
PAM10ST23xxC Series 19
PAM11SO803 19
PAM12SO824 19
PAM13ST2305 37
PAM14ST6305LCC 19
PAM15ST4305 37
PAM16AL30A 51
PAM17DF2LC05C 19
PAM18DF2L0521 19
PAM19DF2L0521P 20
PAM20ST6305 20
PAM21SC790501H 20
PAM24DF1605 48
PAM25DF25K Series 51
PAM27ST2324LC 20
PAM28DOACxxA/CA Series 20
PAM29DOAAxxA/CA Series 20
PAM30DOABxxA/CA Series 20
PAM31DOABxxA/CA Series 20
PAM32DOABxxA/CA Series 21
PAM33DOABxxA/CA Series 21
PAM34ST2305 21
PAM35DOABxxA/CA Series 21
PAM36DOAAxxA/CA Series 21
PAM37SDxxAL/CAL Series 21
PAZC099 37
PBSP-10K Series 54
PBSP-20K Series 54
PDFN2-32 21
PDFN3-32 21
PDLC05 22
PDTVSxxCA Series 51
PESD1CAN 22
PESD1FLEX 22
PESD1LIN 22
PESD2CAN 22
PESD05B 22
PESD05BLC 22
PESD12LCB 22
PESD12ULC 22
PESD24V 22
PESD2402 23
PESD27V 23

PRODUCT INDEX - ALPHANUMERIC

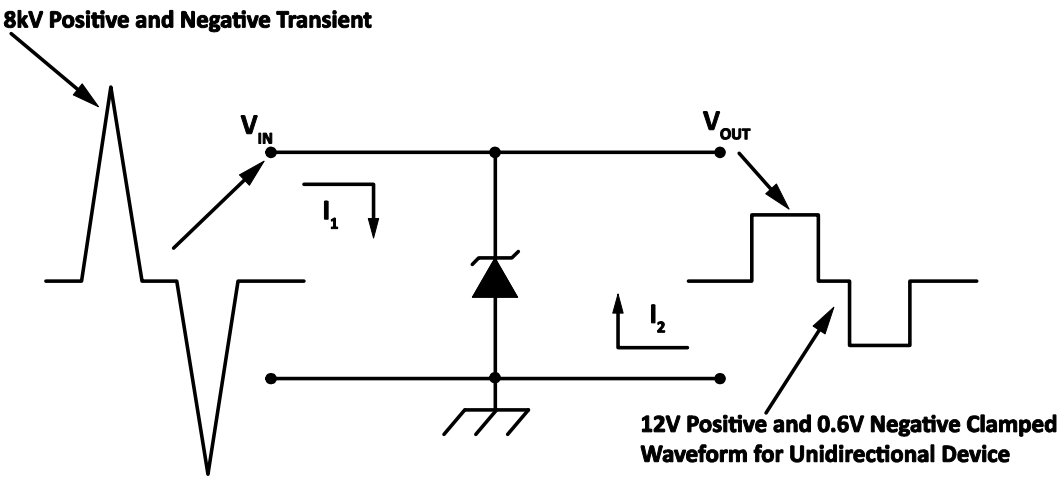
PESD3V3 23
PF0402F Series 56
PF0603F Series 56
PF0603H Series 56
PF0603S Series 57
PF1206F Series 57
PF1206H Series 57
PF1206S Series 58
PHP & PIP Series 52
PLC01-6 23
PLC03-3.3 23
PLR03-.3.H 23
PLC03-3.3-DFN 23
PLC03-xxLC Series 23
PLC03-6 37
PLC496 24
PLC497 37
PLCDA Series 24
PLCDAxxC-6 Series 24
PLED05F189 24
PLED0811PU 24
PLED3631X23NB 24
PLED508 24
PLED508U 24
PLED511 24
PLED511U 24
PLR0502 38
PLR0502-6 38
PLR0503 25
PLR0504F 38
PLR0504PLCN 38
PLR0506 38
PLR0506LP 38
PLR0508 38
PLR0514LC 38
PLR05214LC 38
PLR0521 25
PLR0521E 25
PLR0521U 25
PLR0522 39
PLR0524 39
PLR0524P 39
PLR2210 39
PLR2504 39
PLRxx12 Series 25
PLR2512H 25
PLR3304 39
PLR3304PLCN 39
PLR3343 39
PLR3311 25
PLR4045 39
PLRO1206 Series 59
PLRO1210 Series 60
PLW0501D 25
PLW0501H 26
PLW0501P 26
PLW1201H 26
PLW2.8 26
PMAD Series & PMAD1108 46
PMMAD Series & PMMAD1108 46
PMPS-E-1206 58
PMPS020-FH-1206 58
PMPS075-1812 58
PMPS150-1812 58
PMPS150E-1206 58
PMPS200-1812 58
PMPS200D-1210 58
PMPS260C-1812 58
PMPS380E-1206 58
PP-SM Series 49
PRSB6.8C 26
PRSB6.8CT 26
PRSB6.8D 26
PSDxx/C Series 26
PSDxx61 Series 27
PSDxxHP Series 27
PSLCxx/C Series 27
PSM712 27
PSMDA05-6 27
PSMDAxxC-4 Series 27
PSMDAxxC-8 Series 27
PSMF05 28
PSMFxxAL/CAL Series 28
PSMP30-240 43
PSMSxx/C Series 28
PSOTxx/C Series 28
PSOTxx3/C3 Series 28
PSOT05CLP 28
PSOTxxKCA Series 28
PSOTxxLC Series 29
PSOT05LCC 29
PSOT05ULC 29
PSR05 40
PSR05LC 40
PSR3.3 40
PSRDA70-4 47
PSRDAxx-4 Series 40
PSRDAxx-4A Series 40
PSRDAxx-6 Series 40
PSRDAxx-6A Series 40
PSRVxx-2LC Series 40
PSSB05P 29
PTB05-8ULC 29
PTVSxxA Series 29
PUSB05UBK 41
PUSB403 41
PUSB6B 41
RSB6.8B 29
RSB6.8G 29
RSB6.8S 30
SLVDA2.8LC 30
SLVU2.8 30
SLVU2.8-4 30
SLVU2.8-4G 30
SLVU2.8-8 30
SLVU2.8-8G 30
SM10KWxxA & SM10KWExxA Series 52
SM14MxxC Series 30
SM16xx/C Series 30
SM16LCxx/C Series 30
SM15KPxxAN/CAN Series 52
SM15KWExxA/CA Series 52
SM30KPxxAN/CAN Series 52
SM45KPxxAN/CAN Series 53
SM3KW Series 53
SM5KW Series 53
SM5SxxA Series 31
SM6SxxA Series 31
SM8SxxA Series 31
SM8LC Series 31
SMAJxxA/CA Series 32
SMBJxxA/CA Series 32
SMCJxxA/CA Series 32
SMDAxx/C Series 32
SMDAxx-6 Series 32
SMDAxxCM Series 32
SMDAxxCN-5 Series 32
SMDAxxLC/C Series 33
SMDBxx/C Series 33
SMDB712C 33
SMDD3KxxA Series 53
SMDJxxA/CA Series 33
SMFxxC Series 33
SMLCxxC-2 Series 33
SMP6LCxx-2P Series 34
SMP6LLCxx-2P Series 34

PRODUCT INDEX - ALPHANUMERIC

SMSxx/C Series....34
SR12 41
SR Series....41
SR70 47
SRV05-4....41
SRV05-4-A....41
SRV05-4LC 41
SRV05-4M/T 41
SRV2.8-4....42
SRV25-4....42
SRV25-4LC 42
SRV3.3-4....42
STF701 48
TEL50B & E....55
TEL185B & E 55
U0402FCxxC Series....43
USB002 47
USB004 47
USB04xx/C Series....34
USB508xx/C Series....34
USB208 47
VSIP Series....34
VSB06P05LCI....35
VSMF05LC & VSMF05LCC....36

UNIDIRECTIONAL TVS DEVICE SELECTION PROCESS

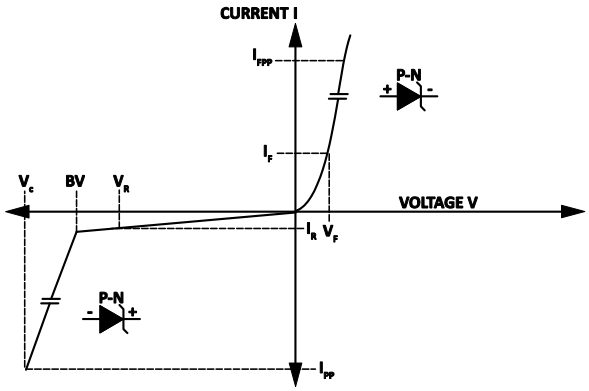
TVS Clamping Characteristics



Unidirectional TVS



Avalanche Junction TVS
VI Characteristics



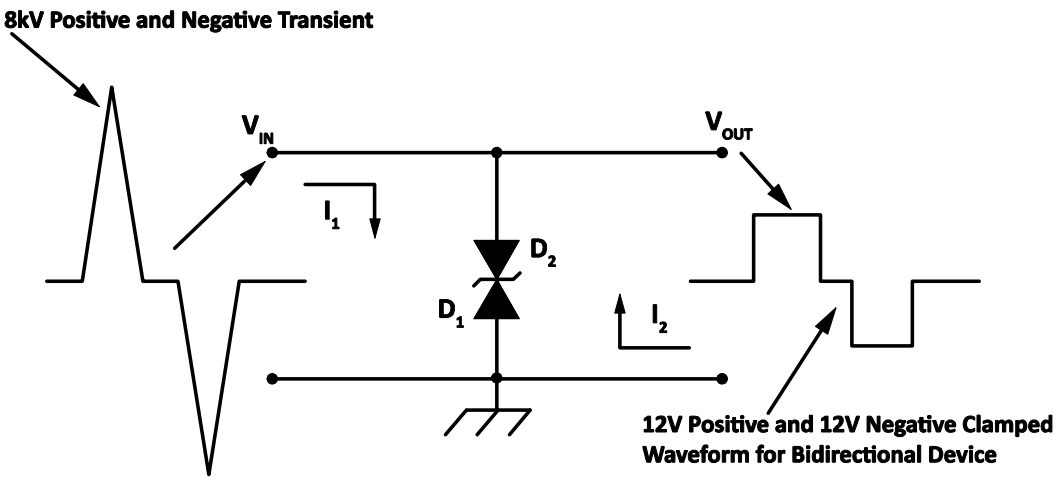
Symbol	Parameter
B_V	Breakdown Voltage
I_R	Leakage Current
V_R	Reverse Stand-Off Voltage
V_C	Clamping Voltage
I_{PP}	Peak Pulse Current

SELECTION PROCESS

TVS Parameters	Application Parameters
Stand-Off Voltage (V_R) $\geq$	Operating Voltage (V_{OP})
Peak Pulse Current (I_P) $\geq$	Transient Current (I_T)
Clamping Voltage (V_C) $\leq$	Voltage Withstand Level (V_{WS})
Input Capacitance of the Device $\leq$	Acceptable Line Loading for Functional Pass

BIDIRECTIONAL TVS DEVICE SELECTION PROCESS

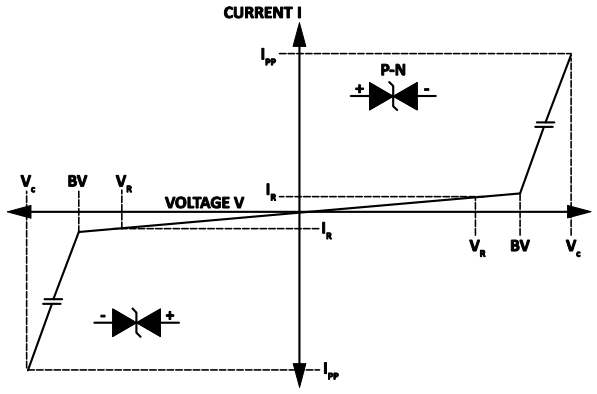
TVS Clamping Characteristics



Bidirectional TVS



Avalanche Junction TVS
VI Characteristics

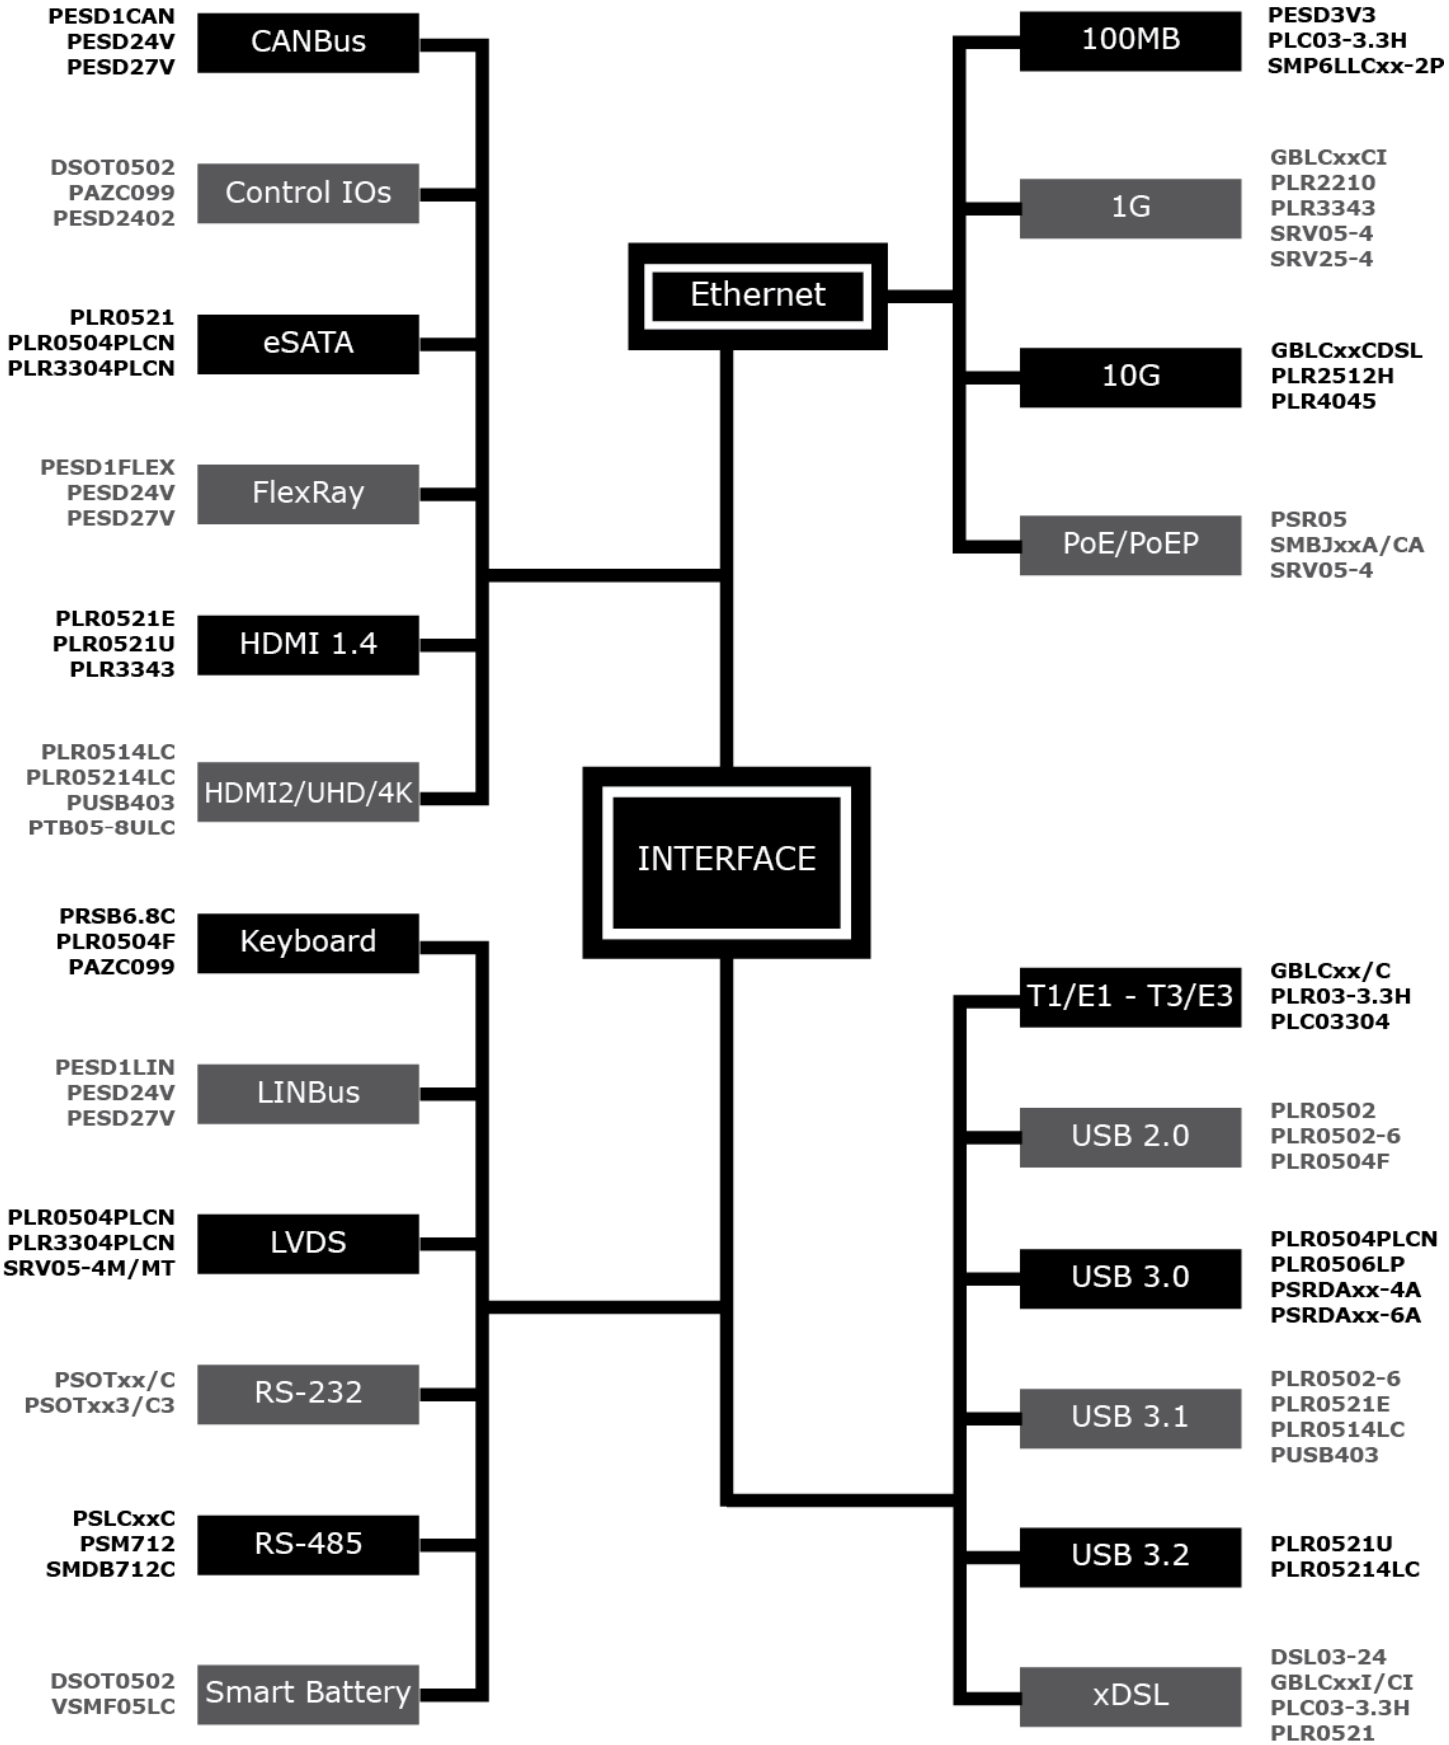


Symbol	Parameter
B_V	Breakdown Voltage
I_R	Leakage Current
V_R	Reverse Stand-Off Voltage
V_C	Clamping Voltage
I_{PP}	Peak Pulse Current

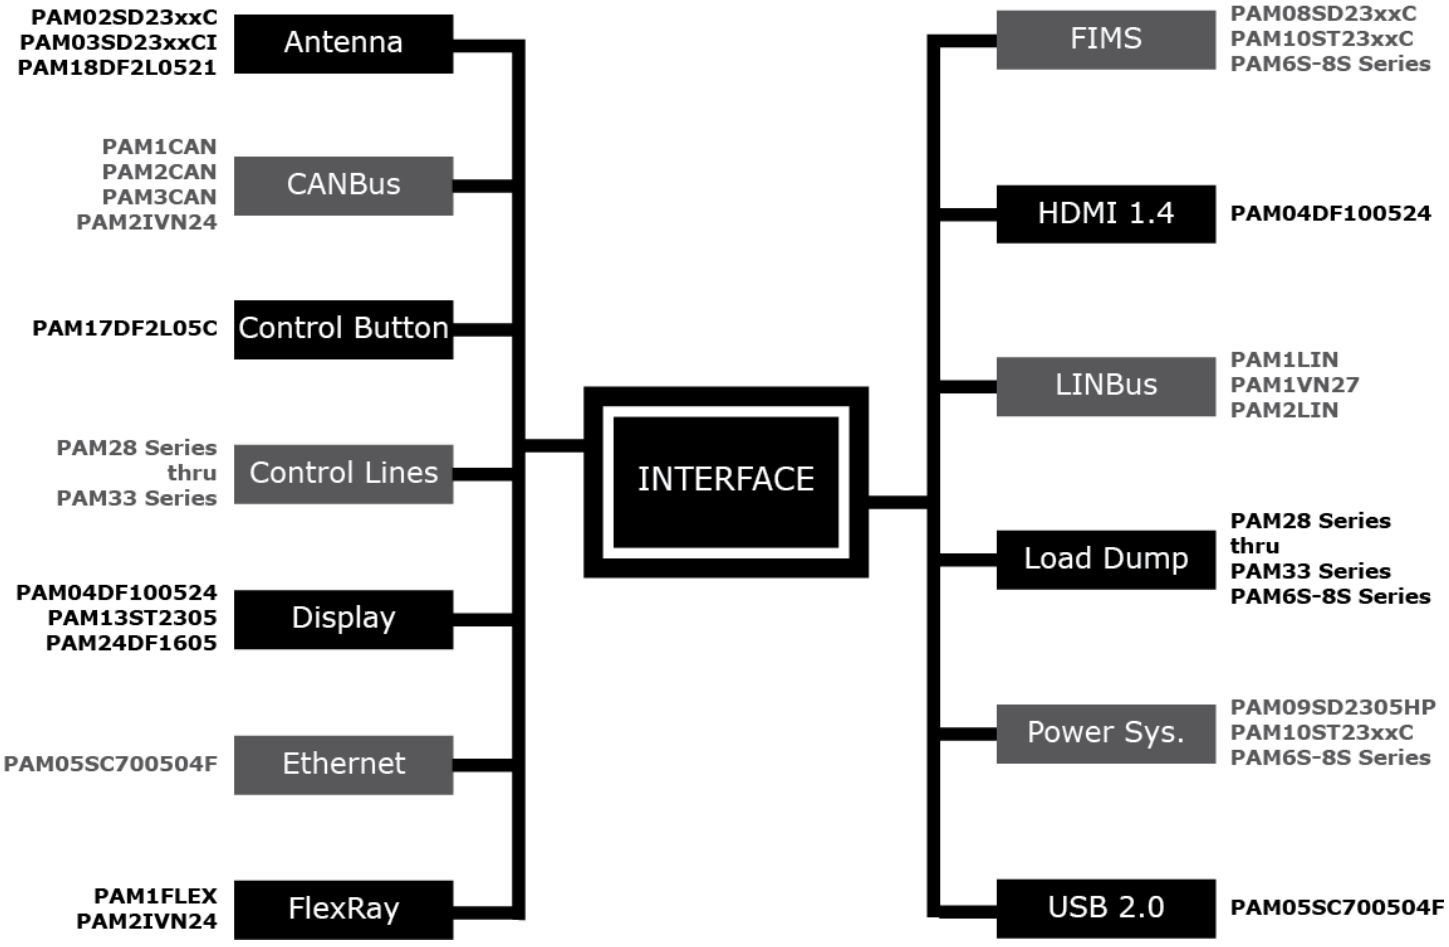
SELECTION PROCESS

TVS Parameters	Application Parameters
Stand-Off Voltage (V_R) $\geq$	Operating Voltage (V_{OP})
Peak Pulse Current (I_P) $\geq$	Transient Current (I_T)
Clamping Voltage (V_C) $\leq$	Voltage Withstand Level (V_{WS})
Input Capacitance of the Device $\leq$	Acceptable Line Loading for Functional Pass

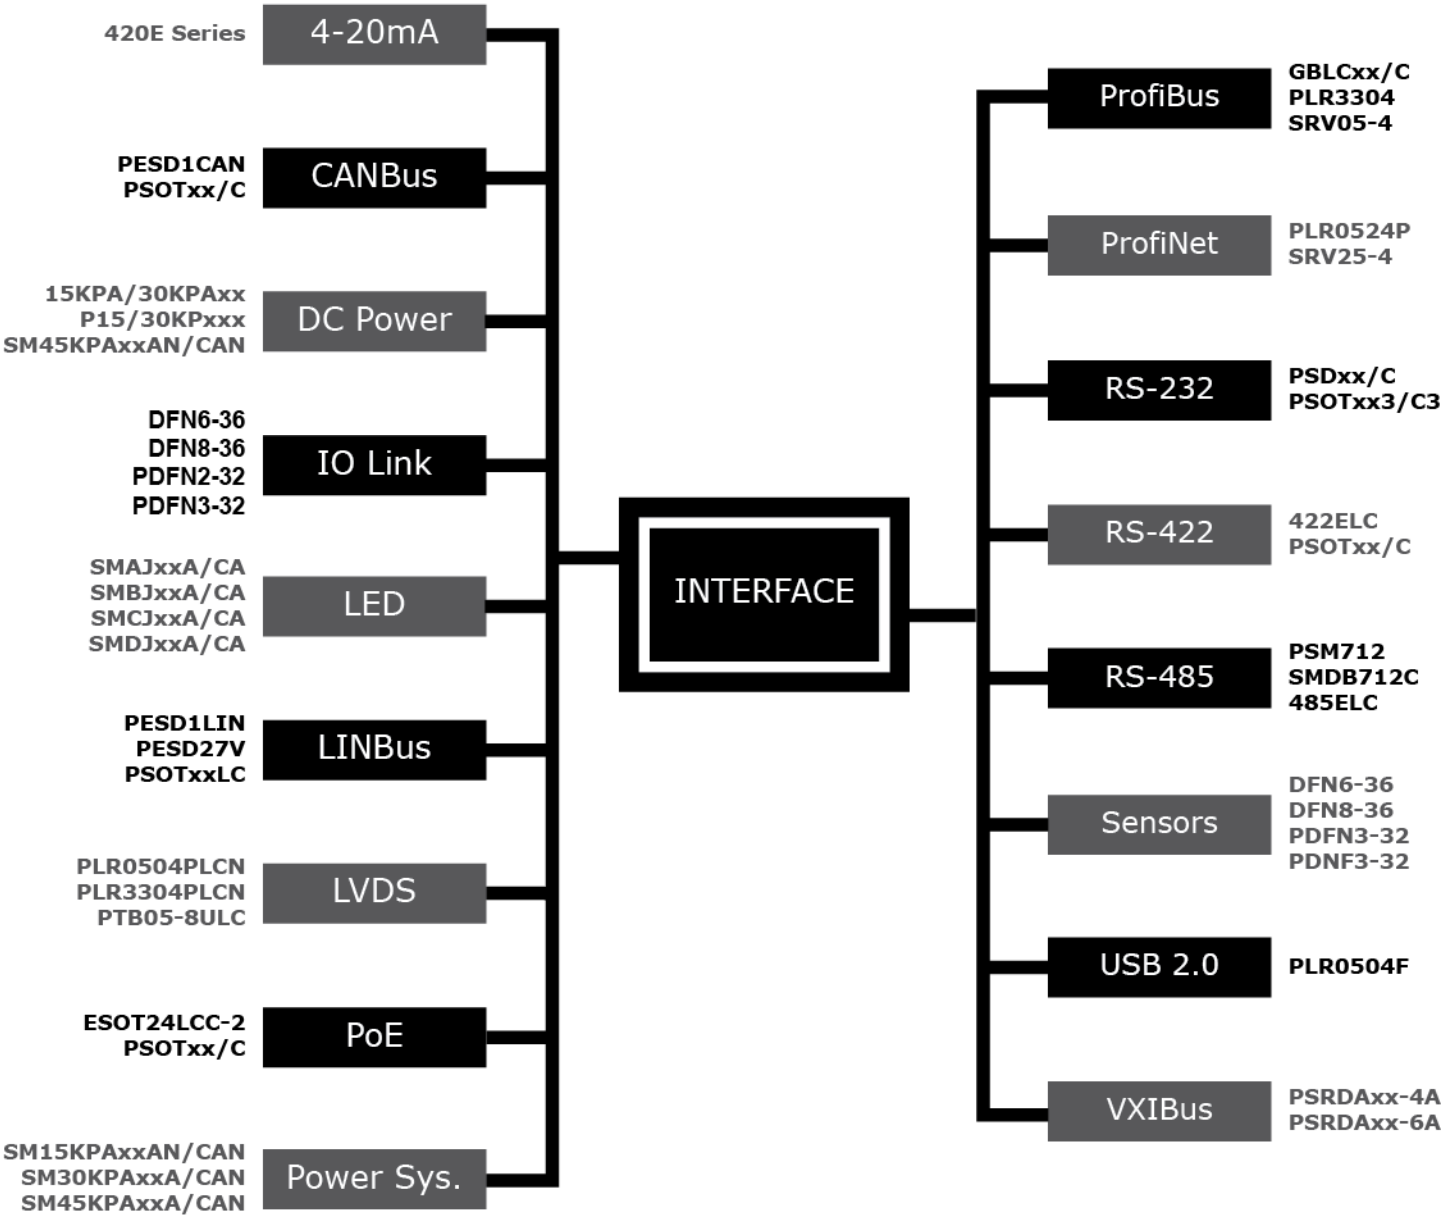
COMMUNICATION APPLICATIONS



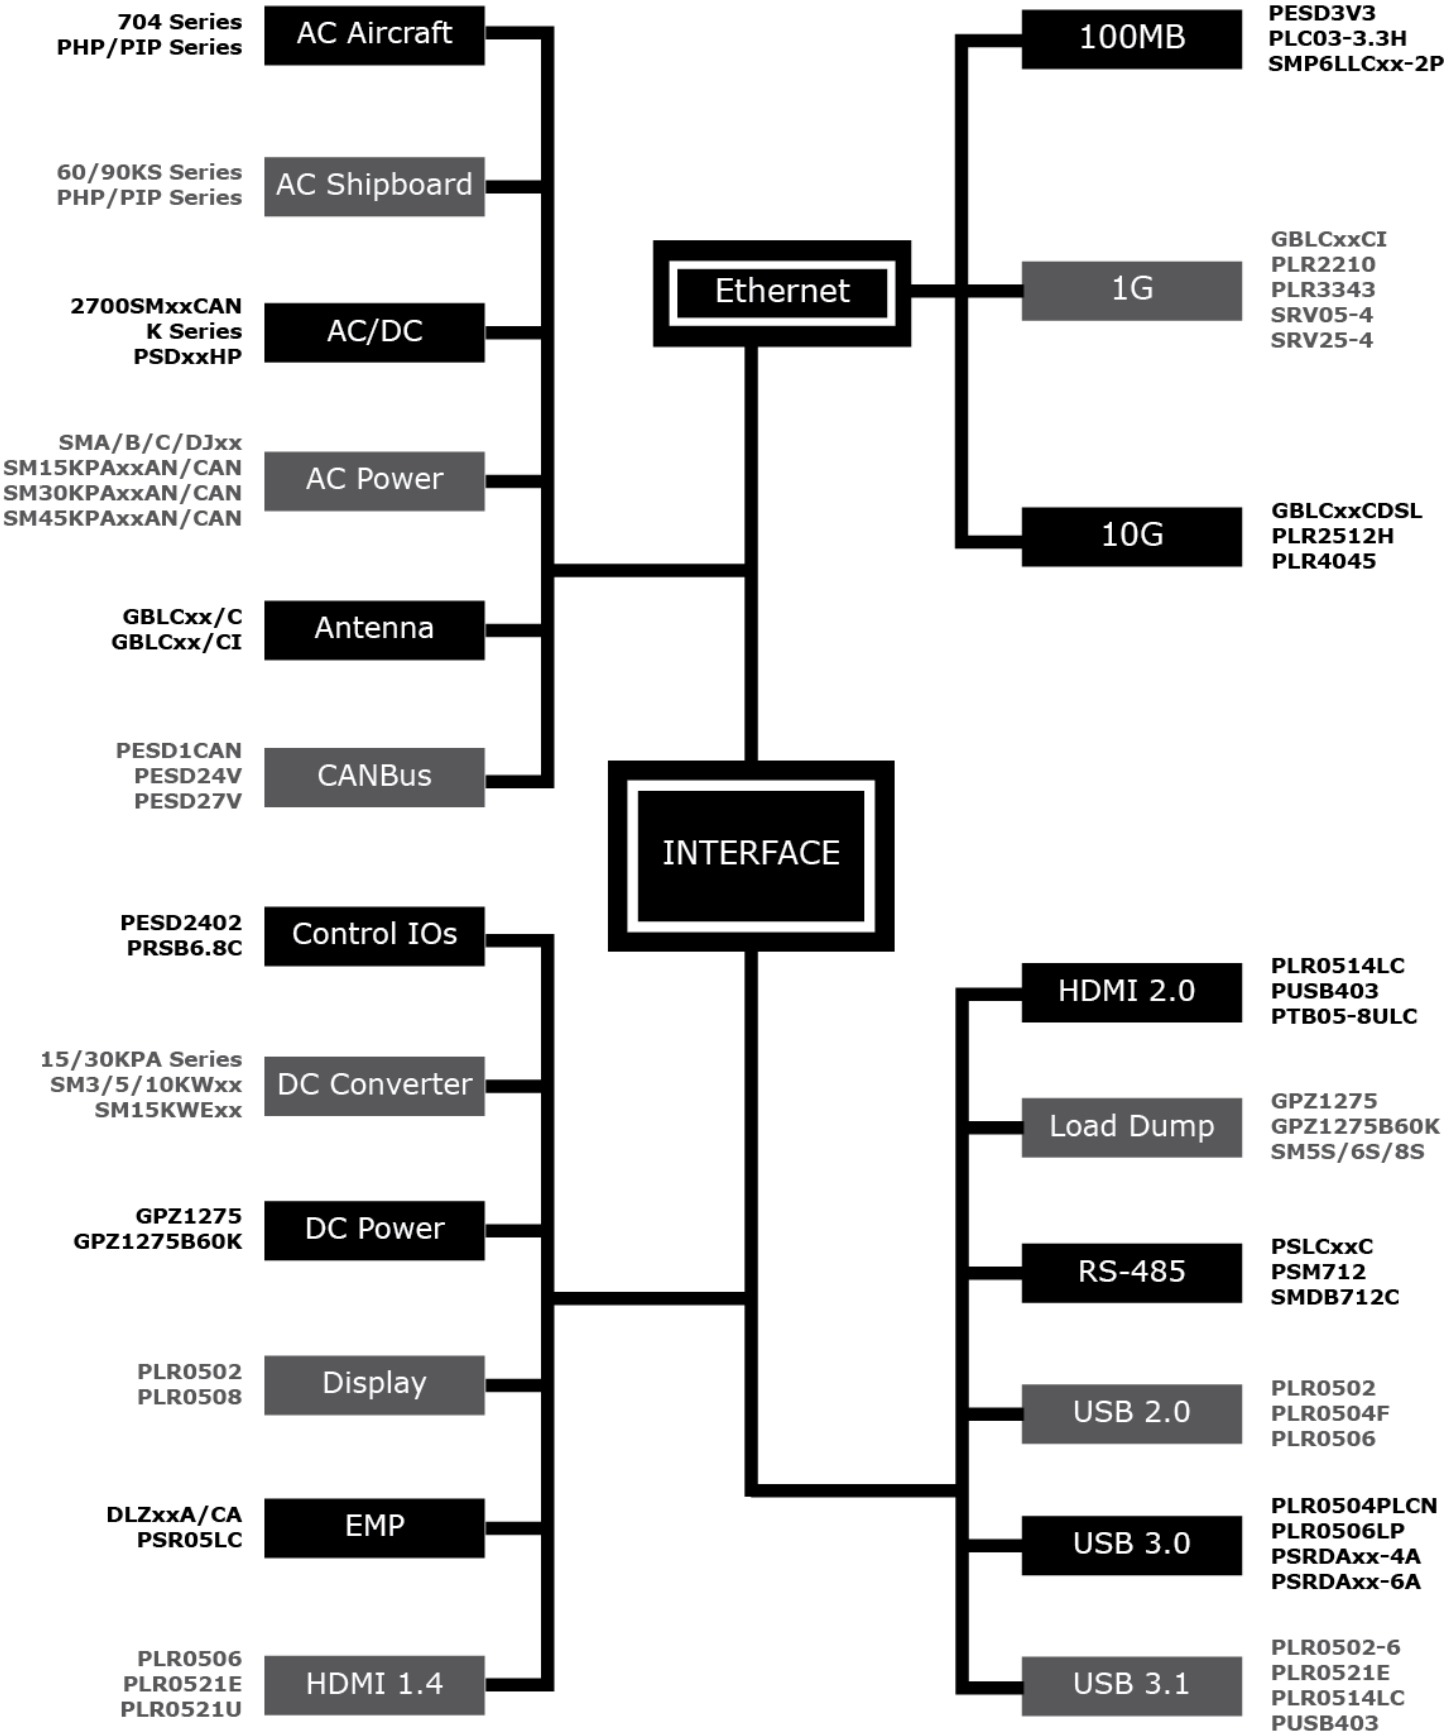
AUTOMOTIVE APPLICATIONS









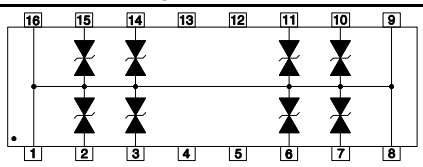
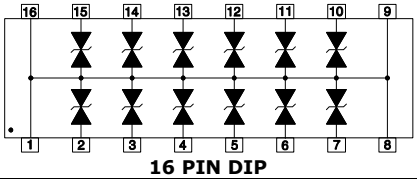
INDUSTRIAL APPLICATIONS





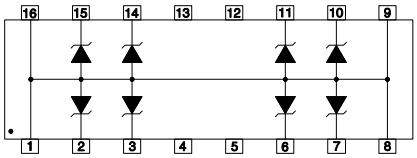
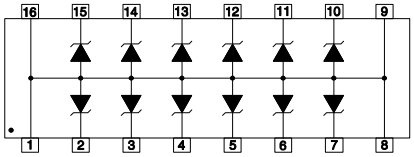



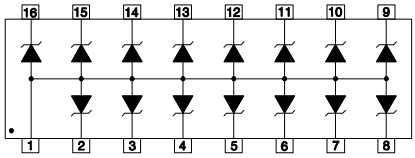
MILITARY/AEROSPACE APPLICATIONS



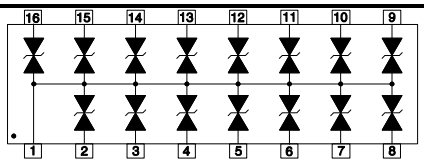








TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
1.0SMBJ5.0A	5.0	6.40	9.2	108.7	200	-	1	1000	
Not all voltages are shown for the 1.0SMBJ Series. Please consult the factory for other voltages.									
1.0SMBJ200A	200.0	224.0	324.0	3.1	1	-	1	1000	**DO-214AA**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as '1.0SMBJ15CA'.									
1.5SMC6.8A	5.8	6.45	10.5	144.8	1000	-	1	1500	
Not all voltages are shown for the 1.5SMC Series. Please consult the factory for other voltages.									
1.5SMC550A	495.0	522.5	760.0	2.0	1	-	1	1500	**DO-214AB**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as '1.5SMC6.8CA.									
5.0SMDJ6.0CA	6.0	6.67	10.3	485	2000	-	1	5000	
Not all voltages are shown for the 5.0SMDJ Series. Please consult the factory for other voltages.									
5.0SMDJ440A	440.0	492.0	713.0	7.0	5	-	1	5000	**DO-214AB**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as '5.0SMDJ440CA'.									
CP05	5.0	6.0	9.8	1.0	20	70	4-5	200	
CP12	12.0	13.3	19.0	1.0	1	50	4-5	200	
CP15	15.0	16.7	24.0	1.0	1	30	4-5	200	
CP24	24.0	26.7	43.0	1.0	1	25	4-5	200	**SOT-23-6**
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'CP05C'.									
DA05CL	5.0	6.0	24.6	45.0	200	500	4	800	
DA12CL	12.0	13.3	32.9	34.0	2	385	4	800	
DA15CL	15.0	16.7	37.7	27.0	2	300	4	800	
DA24CL	24.0	26.7	53.0	20.0	2	200	4	800	**8 PIN DIP**
DA05CM	5.0	6.0	24.6	45.0	200	500	6	800	
DA12CM	12.0	13.3	32.9	34.0	2	385	6	800	
DA15CM	15.0	16.7	37.7	27.0	2	300	6	800	
DA24CM	24.0	26.7	53.0	20.0	2	200	6	800	**8 PIN DIP**
DA05CN	5.0	6.0	24.6	45.0	200	500	8	800	
DA12CN	12.0	13.3	32.9	34.0	2	385	8	800	
DA15CN	15.0	16.7	37.7	27.0	2	300	8	800	
DA24CN	24.0	26.7	53.0	20.0	2	200	8	800	**16 PIN DIP**
DA05CP	5.0	6.0	24.6	45.0	200	500	12	800	
DA12CP	12.0	13.3	32.9	34.0	2	385	12	800	
DA15CP	15.0	16.7	37.7	27.0	2	300	12	800	
DA24CP	24.0	26.7	53.0	20.0	2	200	12	800	**16 PIN DIP**









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
DA05L	5.0	6.0	24.6	45.0	200	880	4	800	 **8 PIN DIP**
DA12L	12.0	13.3	32.9	34.0	2	440	4	800	
DA15L	15.0	16.7	37.7	27.0	2	400	4	800	
DA24L	24.0	26.7	53.0	20.0	2	275	4	800	
DA05M	5.0	6.0	24.6	45.0	200	880	6	800	 **8 PIN DIP**
DA12M	12.0	13.3	32.9	34.0	2	440	6	800	
DA15M	15.0	16.7	37.7	27.0	2	400	6	800	
DA24M	24.0	26.7	53.0	20.0	2	275	6	800	
DA05N	5.0	6.0	24.6	45.0	200	880	8	800	 **16 PIN DIP**
DA12N	12.0	13.3	32.9	34.0	2	440	8	800	
DA15N	15.0	16.7	37.7	27.0	2	400	8	800	
DA24N	24.0	26.7	53.0	20.0	2	275	8	800	
DA05P	5.0	6.0	24.6	45.0	200	880	12	800	 **16 PIN DIP**
DA12P	12.0	13.3	32.9	34.0	2	440	12	800	
DA15P	15.0	16.7	37.7	27.0	2	400	12	800	
DA24P	24.0	26.7	53.0	20.0	2	275	12	800	
DFN6-36	33.0	35.0	45.0	2.0	5	50	3	300	 **DFN-6**
DFN8-36	33.0	35.0	45.0	2.0	5	50	4	300	 **DFN-8**
DL0521P	5.0	6.0	20	1.0	1	0.6	1	20	 **DFN-2-0402**
DLZ-5	5.0	6.0	12.5	10.0	200	880	15	1300	 **16 PIN DIP CERAMIC**
DLZ-5A	5.0	6.0	10.6	10.0	200	880	15	1300	
DLZ-12	12.0	13.3	26.0	10.0	2	440	15	1300	
DLZ-12A	12.0	13.3	23.5	10.0	2	440	15	1300	
DLZ-17	17.0	19.2	37.4	10.0	2	330	15	1300	
DLZ-17A	17.0	19.2	33.9	10.0	2	330	15	1300	
DLZ-24	24.0	26.7	52.1	10.0	2	275	15	1300	
DLZ-24A	24.0	26.7	47.2	10.0	2	275	15	1300	
DLZ-30	30.0	33.3	65.0	10.0	2	220	15	1300	
DLZ-30A	30.0	33.3	58.8	10.0	2	220	15	1300	




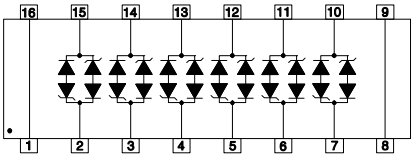
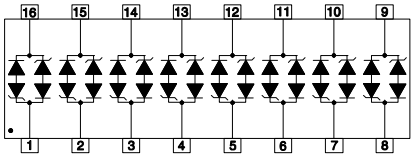



TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
DLZ-8C	8.0	8.5	16.6	10.0	10	440	15	1300	 **16 PIN DIP CERAMIC**
DLZ-13C	13.0	14.4	28.1	10.0	4	385	15	1300	
DLZ-13CA	13.0	14.4	25.4	10.0	4	385	15	1300	
DLZ-19C	19.0	21.6	42.1	10.0	4	275	15	1300	
DLZ-19CA	19.0	21.6	38.1	10.0	4	275	15	1300	
DLZ-30C	30.0	33.3	65.0	10.0	4	165	15	1300	
DLZ-30CA	30.0	33.3	58.8	10.0	4	165	15	1300	
Note: The DLZ Series is not ROHS Complaint.									
DSOT0502	5.0	6.0	12.5	2.0	2	9	1	25	 **SOT-883**
EBLC05C	5.0	6.0	18.3	17.0	5	3	1	250	 **SOD-323**
EBLC08C	8.0	8.5	28.0	12.0	2	3	1	250	
EBLC12C	12.0	13.3	31.0	8.0	1	3	1	250	
ESD4-DFN	5.0	6.0	12.0	1.0	0.1 @ 3V	7 @ 2.5V	4	25	 **DFN-4**
ESDA05C-5	5.0	6.1	-	-	1	15	5	80	 **SOT-23-6**
ESOT12LCC-1	12.0	13.3	19.0	1.0	1	3	2	250	 **SOT-23-6**
ESOT24LCC-2	24.0	26.6	-	-	1	6	2	100	 **SOT-23**
ESOT3.3LC-2	3.3	3.5	6.5	1.0	2	15	2	175	 **SOT-23**
ESOT3.3LCC	3.3	3.6	-	-	2	15	1	50	 **SOT-23**









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
GBLC03	3.3	4.0	7.0	1.0	5	3	1	350	 **SOD-323**
GBLC05	5.0	6.0	9.8	1.0	5	3	1	350	
GBLC08	8.0	8.5	13.4	1.0	2	3	1	350	
GBLC12	12.0	13.3	19.0	1.0	1	3	1	350	
GBLC15	15.0	16.7	24.0	1.0	1	3	1	350	
GBLC18	18.0	20.0	29.0	1.0	1	3	1	350	
GBLC24	24.0	26.7	43.0	1.0	1	3	1	350	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'GBLC05C'.									
GBLC05CDN	5.0	6.0	18.3	17.0	5	3	1	350	 **DFN-2**
GBLC08CDN	8.0	8.5	18.5	17.0	2	3	1	350	
GBLC12CDN	12.0	13.3	26.5	11.0	1	3	1	350	
GBLC15CDN	15.0	16.7	31.8	10.0	1	3	1	350	
GBLC24CDN	24.0	26.7	56.0	6.0	1	3	1	350	
GBLC12CDSL	12.0	13.3	19.0	1.0	1	3	1	350	 **SOD-323**
GBLC24CDSL	24.0	26.7	43.0	1.0	1	3	1	350	
GBLC03CIDFN	3.0	4.0	7.0	1.0	1	0.6	1	250	 **DFN-2**
GBLC05CIDFN	5.0	6.1	8.0	1.0	5	0.6	1	250	
GBLC03CIDNHP	3.0	4.0	24.0	20.0	5	0.6	1	500	 **DFN-2**
GBLC03CIHP	3.0	4.0	24.0	20.0	5	0.6	1	500	 **SOD-323**
GBLC03I	3.0	4.0	7.0	1.0	5	0.6	1	250	 **SOD-323**
GBLC05I	5.0	6.0	9.8	1.0	5	0.6	1	250	
GBLC08I	8.0	8.5	13.4	1.0	2	0.6	1	250	
GBLC12I	12.0	13.3	19.0	1.0	1	0.6	1	250	
GBLC15I	15.0	16.7	24.0	1.0	1	0.6	1	250	
GBLC18I	18.0	20.0	29.0	1.0	1	0.6	1	250	
GBLC24I	24.0	26.7	43.0	1.0	1	0.6	1	250	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'GBLC05CI'.									
GBLC03LC	3.3	4.0	7.0	1.0	1	0.8	1	250	 **SOD-323**
GBLC05LC	5.0	6.0	9.8	1.0	5	0.7	1	250	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'GBLC05CLC'.									









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
GBLCSC03	3.3	4.0	13.0	10.0	1	1.5	1	200	 **SC-79**
GBLCSC05	5.0	6.0	16.0	10.0	1	1.5	1	200	
GBLCSC08	8.0	8.5	-	-	1	1.5	1	200	
GBLCSC12	12.0	13.3	-	-	1	1.5	1	200	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'GBLCSC05C'.									
GBLCSC08CLC	8.0	8.5	13.0	1.0	1	0.4	1	125	 **SC-79**
GBLLC03	3.0	4.0	7.0	1.0	1	0.4	1	200	 **SOD-323**
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'GBLLC03C'.									
LCA05C	5.0	6.0	24.0	45.0	100	15	6	800	 **16 PIN DIP**
LCA08C	8.0	8.5	25.5	40.0	10	15	6	800	
LCA12C	12.0	13.3	32.0	34.0	4	15	6	800	
LCA15C	15.0	16.7	38.0	27.0	4	15	6	800	
LCA24C	24.0	26.7	48.0	22.0	4	15	6	800	
LCD05C	5.0	6.0	24.0	45.0	100	15	8	800	 **16 PIN DIP**
LCD08C	8.0	8.5	25.5	40.0	10	15	8	800	
LCD12C	12.0	13.3	32.0	34.0	4	15	8	800	
LCD15C	15.0	16.7	38.0	27.0	4	15	8	800	
LCD24C	24.0	26.7	48.0	22.0	4	15	8	800	
MSMF05	5.0	6.0	12.0	9.0	1	40	3-4	100	 **SOT-553**
MSMF12	12.0	13.3	23.8	4.2	1	20	3-4	100	
MSMF15	15.0	16.7	33.3	3.0	1	15	3-4	100	
MSMF24	24.0	26.7	55.5	1.8	1	10	3-4	100	
MSMF05C	5.0	6.0	12.0	9.0	1	40	4-5	100	 **SOT-563**
MSMF12C	12.0	13.3	23.8	4.2	1	20	4-5	100	
MSMF15C	15.0	16.7	33.3	3.0	1	15	4-5	100	
MSMF24C	24.0	26.7	55.5	1.8	1	10	4-5	100	
MSMF05LC	5.0	6.0	12.0	2.0	1	9	3-4	25	 **SOT-553**
Note: Also available in SOT-953 package configuration, part number VSMF05LC									









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
MSMF05LCC	5.0	6.0	12.0	2	1	9	4-5	25	 **SOT-563**
Note: Also available in SOT-963 package configuration, part number VSMF05LCC									
P0201D05C	4.7	5.7	16.0	1.0	0.1	5	1	10	 **DFN-2-0201**
P0201V05	5.0	-	40.0	-	0.10	0.15	1	-	 **CERAMIC-0201**
P0402V05	5.0	-	35.0	-	0.10	0.15	1	-	
P0402V15	15.0	-	35.0	-	0.10	0.05	1	-	**CERAMIC-0402**
P0402VP24	24.0	-	20.0	-	0.10	0.05	1	-	 **CERAMIC-0402**
P0603V24	24.0	-	35.0	-	0.10	0.05	1	-	 **0603**
P5V0S1UL	5.0	6.0	9.8	1.0	1	70	1	150	 **DFN-2-0402**
P5V0S1ULC	5.0	6.0	9.8	1.0	1	30	1	110	 **DFN-2-0402**

TVS DIODE ARRAYS









PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
P4SMA130A	111.0	124.0	179.0	2.3	1	-	1	400	
Not all voltages are shown for the P4SMA Series. Please consult the factory for other voltages.									
P4SMA400A	342.0	380.0	548.0	0.8	1	-	1	400	**DO-214AC**
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'P4SMA350CA'.									
P6SMB6.8A	5.8	6.46	10.5	57.14	1000	-	1	600	
Not all voltages are shown for the P6SMB Series. Please consult the factory for other voltages.									
P6SMB600A	513	570	828.0	0.72	1	-	1	600	**DO-214AA**
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'P6SMB6.8CA'.									
PAM01SC7905C	5.0	6.0	16.0	10.0	1	1.5	1	200	 **SC-79**
PAM02SD2303C	3.3	4.0	7.0	1.0	5	3	1	350	 **SOD-323**
PAM02SD2305C	5.0	6.0	9.8	1.0	5	3	1	350	
PAM02SD2308C	8.0	8.5	13.4	1.0	2	3	1	350	
PAM02SD2312	12.0	13.3	19.0	1.0	1	3	1	350	
PAM02SD2312C	12.0	13.3	19.0	1.0	1	3	1	350	
PAM02SD2315C	15.0	16.7	24.0	1.0	1	3	1	350	
PAM02SD2318C	18.0	20.0	29.0	1.0	1	3	1	350	
PAM02SD2324C	24.0	26.7	43.0	1.0	1	3	1	350	
PAM03SD2303CI	3.0	4.0	7.0	1.0	5	0.6	1	250	 **SOD-323**
PAM03SD2312CI	12.0	13.3	19.0	1.0	1	0.6	1	250	
PAM03SD2318CI	18.0	20.0	29.0	1.0	1	0.6	1	250	
PAM06SC7905S	4.7	5.7	-	-	0.5	30	1	10	 **SC-79**
Not: I_{PP} and P_{PP} @ 10/1000µs, Leakage Current – V_{WM} @ 3.5V									
PAM08SD2303	3.3	4.0	6.5	1.0	125	500	1	500	 **SOD-323**
PAM08SD2303C	3.3	4.0	7.0	1.0	125	200	1	400	
PAM08SD2305C	5.0	6.0	9.8	1.0	10	175	1	400	
PAM05SD2308C	8.0	8.5	13.4	1.0	10	150	1	400	
PAM08SD2312C	12.0	13.3	19.0	1.0	1	50	1	400	
PAM08SD2315	15.0	16.7	24.0	1.0	1	100	1	500	
PAM08SD2324C	24.0	26.7	43.0	1.0	1	40	1	400	
PAM08SD2336C	36.0	40.0	60.0	1.0	1	35	1	400	
PAM09SD2305HP	5.0	6.0	15.0	72.0	20	800	1	1000	 **SOD-323**

TVS DIODE ARRAYS









PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PAM1CAN	24.0	25.4	70.0	3.0	0.05	11	2	200	 **SOT-23**
PAM1FLEX	24.0	25.4	70.0	3.0	0.05	11	2	200	
PAM1IVN27	27.0	28.0	45.0	3.0	0.8	15	1	135	 **SOD-323**
PAM1LIN PIN 1 - 2	15.0	17.2	44.0	5.0	0.045	17	1	200	 **SOD-323**
PIN 2 - 1	24.0	25.5	70.0	3.0	0.045	17	1	200	
PAM2CAN	24.0	25.4	60.0	4.0	0.05	11	2	230	 **SOT-23**
PAM2IVN24	24.0	25.5	42.0	3.5	10	20	2	150	 **SOT-23**
PAM2LIN	24.0	26.7	43.0	1.0	0.001	3	2	200	 **SOD-323**
PAM3CAN	24.0	25.4	70.0	2.1	0.002	5	2	150	 **SOT-23**
PAM5S14A	14.0	15.6	23.2	155	10	-	1	3600	 **DO-218AB**
Not all voltages are shown for the PAM5S Series. Please consult the factory for other voltages.									
PAM5S36A	36.0	40.0	58.1	62	10	-	1	3600	

Note: I_{PP} and P_{PP} @ 10/1000µs.









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PAM6S14A	14.0	15.6	23.2	198	10	-	1	4600	
Not all voltages are shown for the PAM6S Series. Please consult the factory for other voltages.									
PAM6S36A	36.0	40.0	58.1	79	10	-	1	4600	**DO-218AB**
Note: I_{PP} and P_{PP} @ 10/1000µs.									
PAM8S14A	14.0	15.6	23.2	284	10	-	1	6600	
Not all voltages are shown for the PAM8S Series. Please consult the factory for other voltages.									
PAM8S48A	48.0	53.3	85.2	77.4	10	-	1	6600	**DO-218AB**
Note: I_{PP} and P_{PP} @ 10/1000µs.									
PAM10ST2303C	3.3	4.0	10.9	43.0	125	300	1	500	
PAM10ST2308C	8.0	8.5	16.9	34.0	10	150	1	500	
PAM10ST2315C	15.0	16.7	30.0	17.0	1	60	1	500	
PAM10ST2324C	24.0	26.7	49.0	12.0	1	63	1	500	
PAM10ST2336C	36.0	40.0	76.8	9.0	1	60	1	500	**SOT-23**
PAM11SO803	3.0	2.8	18.0	100.0	2	25	1	1800	 **SO-8**
PAM12SO824	2.8	3.0	21.0	30.0	1	3	2P	600	 **SO-8**
PAM14ST6305LCC	5.0	6.0	12.0	2.0	1	9	4-5	25	 **SOT-563**
PAM17DF2L05C	4.7	5.7	-	-	1	15	1	10	 **DFN-2-0402**
Note: I_{PP} and P_{PP} at 10/1000µs.									
PAM18DF2L0521	5.0	6.0	20.0	3.0	1	0.4	1	80	 **DFN-2-0402**










TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PAM19DF2L0521P	5.0	6.0	20.0	1.0	1	0.6	1	20	 **DFN-2-0402**
PAM20ST6305	5.0	6.0	12.0	9.0	1	40	4-5	100	 **SOT-563**
PAM21SC790501H	5.0	6.0	12.5	16.0	5	120	1	250	 **SC-79**
PAM27ST2324LC	24.0	26.7	46.0	5.0	1	5	1	500	 **SOT-23**
PAM28DOAC6.5A	6.5	7.22	11.2	35.7	500	-	1	400	 **DO-214AC**
Not all voltages are shown for the PAM28DOAC Series. Please consult the factory for other voltages.									
PAM28DOAC120A	120.0	133.0	193.0	2.1	1	-	1	400	
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM28DOAC12CA'.									
PAM29DOAA5.0A	5.0	6.40	9.2	65.2	800	-	1	600	 **DO-214AA**
Not all voltages are shown for the PAM29DOAA Series. Please consult the factory for other voltages.									
PAM29DOAA180A	180.0	200.0	291.6	2.1	1	-	1	600	
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM29DOAA26CA'.									
PAM30DOAA6.8A	5.8	6.46	10.5	57.14	1000	-	1	600	 **DO-214AA**
Not all voltages are shown for the PAM30DOAA Series. Please consult the factory for other voltages.									
PAM30DOAA600A	513	570	828.0	0.72	1	-	1	600	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM30DOAA6.8CA'.									
PAM31DOAB18A	18.0	20.0	29.2	51.4	1	-	1	1500	 **DO-214AB**
Not all voltages are shown for the PAM31DOAB Series. Please consult the factory for other voltages.									
PAM31DOAB120A	120.0	133.0	193.0	7.8	1	-	1	1500	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM31DOAB18CA'.									




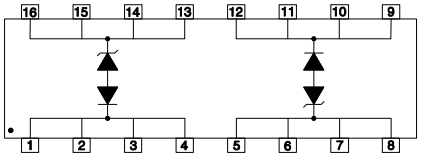




TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PAM32DOAB20A	20.0	22.2	32.4	92.5	2	-	1	3000	 **DO-214AB**
PAM32DOAB22A	22.0	24.4	35.5	84.5	2	-	1	3000	
PAM32DOAB28A	28.0	31.1	45.4	66.1	2	-	1	3000	
PAM32DOAB36A	36.0	40.0	58.1	51.6	2	-	1	3000	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM32DOAB36CA'.									
PAM33DOAB18A	18.0	20.0	29.2	173	10	-	1	5000	 **DO-214AB**
Not all voltages are shown for the PAM33DOAB Series. Please consult the factory for other voltages.									
PAM33DOAB180A	180.0	200.0	291.6	17.3	5	-	1	5000	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM33DOAB18A'.									
PAM34ST2305	5.0	6.0	9.8	1.0	5	0.8	1	-	 **SOT-23**
PAM35DOAB30A	25.6	28.5	41.4	36.7	1	-	1	1500	 **DO-214AB**
PAM35DOAB47A	40.2	44.7	64.8	23.5	1	-	1	1500	
PAM35DOAB75A	64.2	71.3	103.0	14.8	1	-	1	1500	
PAM33DOAB300A	256.0	285.0	414.0	3.7	1	-	1	1500	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM35DOAB75CA'.									
PAM36DOAA33A	33.0	36.70	53.3	18.8	1	-	1	1000	 **DO-214AA**
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM36DOAA33CA'.									
PAM37SD6.0AL	6.0	6.67	10.3	35.9	120	-	1	400	 **SOD-123FL**
Not all voltages are shown for the PAM37SDxxAL Series. Please consult the factory for other voltages.									
PAM37SD58AL	58.0	64.4	93.6	4.3	1	-	1	400	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PAM37SD12CAL'.									
PDFN2-32	32.0	34.0	55.0	25.0	5	-	1	1400	 **DFN2020-3**
PDFN3-32	32.0	34.0	55.0	25.0	0.2	-	1	2800	 **DFN-3**








TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PDLC05	5.0	6.0	9.8	1.0	5	0.8	1	-	 **SOT-23**
PESD1CAN	24.0	25.4	70.0	3.0	0.05	11	2	200	 **SOT-23**
PESD1FLEX	24.0	25.4	70.0	3.0	0.05	11	2	200	
PESD1LIN PIN 1 – 2	15.0	17.2	44.0	5.0	0.045	17	1	200	 **SOD-323**
PIN 2 - 1	24.0	25.5	70.0	3.0	0.045	17	1	200	
PESD2CAN	24.0	25.4	60.0	4.0	0.05	11	2	230	 **SOT-23**
PESD05B	5.0	5.6	9.5	4.0	1	10	1	40	 **DFN-0603-2**
PESD05BLC	5.0	7.0	9.5	3.0	1	0.42	1	40	 **DFN-0603-2**
PESD12LCB	12.0	14.0	27	4	1	8	1	90	 **DFN-1006-2**
PESD12ULC	12.0	14.5	23	3.5	1	15.5	1	70	 **DFN-0603-2**
PESD24V	24.0	25.5	42.0	3.5	0.8	20	1	150	 **SOT-23**









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PESD2402	24.0	25.4	-	-	0.5	22	2	100	 **SOT-23**
PESD27V	27.0	28.0	45.0	3.0	0.10	15	1	135	 **SOD-323**
PESD3V3	3.3	5.2	20.0	20.0	2	20	1	400	 **SOD-323**
PLC01-6	6.0	8.0	16.0	200.0	25	50	1	1500	 **SO-16(WIDE BODY)**
Note: I_{PP} & P_{PP} @ 10/1000µs									
PLC03-3.3	3.0	2.8	22.0	150.0	2	25	1	3300	 **SO-8**
PLC03-3.3H	3.0	2.8	25.0	240.0	2	25	1	6000	 **SO-8**
PLC03-3.3-DFN	3.0	2.8	18.0	100.0	2	25	1	1800	 **DFN-6**
PLC03-3.3LC	3.0	2.8	18.0	100.0	2	6	1	1800	 **SO-8**
PLC03-6LC	6.0	6.8	20.0	90.0	2.5	6	1	1800	









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PLC496	1.0	2.5	12.5	30.0	1	1.25	1	500	 **SO-8**
PLCDA03	3.3	4.5	7.0	1.0	125	5	2	500	 **SO-8**
PLCDA05	5.0	6.0	9.8	1.0	20	5	2	500	
PLCDA08	8.0	8.5	13.4	1.0	10	5	2	500	
PLCDA12	12.0	13.3	19.0	1.0	1	5	2	500	
PLCDA15	15.0	16.7	24.0	1.0	1	5	2	500	
PLCDA24	24.0	26.7	43.0	1.0	1	5	2	500	
PLCDA03C-6	3.3	4.5	7.0	1.0	125	8	6	500	 **SO-8**
PLCDA05C-6	5.0	6.0	9.8	1.0	20	8	6	500	
PLCDA08C-6	8.0	8.5	13.4	1.0	10	8	6	500	
PLCDA12C-6	12.0	13.3	19.0	1.0	2	8	6	500	
PLCDA15C-6	15.0	16.7	24.0	1.0	2	8	6	500	
PLED05F189	5.0	6.0	-	-	10	10	1	-	 **DIE**
PLED0811PU	8.0	8.5	-	-	1	70	1	-	 **DIE**
PLED3631X23NB	36.0	40.0	-	-	1	60	-	-	 **DIE**
PLED508	4.7	5.7	-	-	1	15	-	-	 **DIE**
PLED508U	5.0	6.0	-	-	0.1	80	-	-	 **DIE**
PLED511	4.7	5.7	13.0	1.0	1	15	-	-	 **DIE**
PLED511U	5.0	6.0	-	-	0.5	80	-	-	 **DIE**








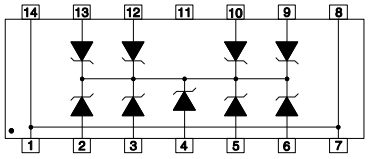
TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PLR0503	5.0	6.0	12.5	2.0	1	9	1	25	 **SOT-143**
PLR0521	5.0	6.0	20.0	4.0	1	0.4	1	80	 **DFN-2-0402**
PLR0521E	5.0	6.0	20.0	4.0	1	0.4	1	80	 **DFN-2-0402**
PLR0521U	5.0	6.0	20.0	4.0	1	0.8	1	80	 **DFN-2-0402**
PLR2512H	2.5	2.7	8.0	10.0	0.05	3	2P	100	 **DFN-8**
PLR2512	2.5	2.7	10.2	10.0	0.05	3	2P	100	 **DFN-8**
PLR3312	3.3	3.5	11.0	10.0	0.05	3	2P	100	
PLR3311	3.3	3.3	8.0	5.0	0.05	5	1	40	 **DFN-2**
PLW0501D	5.0	6.0	9.8	1.0	1	70	1	150	 **DFN-2-0402**









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PLW0501H	5.0	6.0	12.5	16.0	5	120	1	250	 **SC-79**
PLW0501P	5.0	6.0	12.5	16.0	5	120	1	250	 **DFN-2-0402**
PLW1201H	12.0	13.3	24.0	5.0	1	50	1	200	 **SC-79**
PLW2.8	2.8	3.0	5.0	1.0	1	6	1	50	 **SC-79**
PRSB6.8C	4.7	5.7	17.5	3.0	0.5	15	1	50	 **DFN-2-0402**
PRSB6.8CT	4.7	5.7	-	-	1	15	1	10	 **DFN-2-0402**
Note: I_{PP} & P_{PP} @ 10/1000µs.									
PRSB6.8D	4.7	5.7	-	-	1	15	1	10	 **SOD-923**
Note: I_{PP} & P_{PP} @ 10/1000µs.									
PSD03	3.3	4.0	6.5	1.0	125	500	1	500	 **SOD-323**
PSD05	5.0	6.0	9.8	1.0	10	350	1	500	
PSD08	8.0	8.5	13.4	1.0	10	250	1	500	
PSD12	12.0	13.3	19.0	1.0	1	150	1	500	
PSD15	15.0	16.7	24.0	1.0	1	100	1	500	
PSD18	18.0	20.0	29.0	1.0	1	90	1	500	
PSD24	24.0	26.7	43.0	1.0	1	88	1	500	
PSD36	36.0	40.0	60.0	1.0	1	75	1	500	





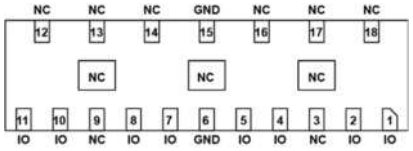



TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PSD03C	3.3	4.0	7.0	1.0	125	200	1	400	 **SOD-323**
PSD05C	5.0	6.0	9.8	1.0	10	175	1	400	
PSD08C	8.0	8.5	13.4	1.0	10	150	1	400	
PSD12C	12.0	13.3	19.0	1.0	1	50	1	400	
PSD15C	15.0	16.7	24.0	1.0	1	40	1	400	
PSD18C	18.0	20.0	29.0	1.0	1	40	1	400	
PSD24C	24.0	26.7	43.0	1.0	1	40	1	400	
PSD36C	36.0	40.0	60.0	1.0	1	35	1	400	
PSD0561	5.0	6.0	16.0	90.0	0.3	800	1	1400	 **DFN-2**
PSD3261	32.0	34.0	60.0	25.0	0.2	300	1	1400	
PSD05HP	5.0	6.0	15.0	72.0	20	800	1	1000	 **SOD-323**
PSD10HP	10.0	11.0	25.0	45.0	2	500	1	1000	
PSD12HP	12.0	13.3	32.0	34.0	2	440	1	1000	
PSLC03	3.3	4.0	19.0	20.0	125	3	1	350	 **SOT-143**
PSLC05	5.0	6.0	18.3	17.0	20	3	1	350	
PSLC08	8.0	8.5	18.5	17.0	10	3	1	350	
PSLC12	12.0	13.3	28.6	11.0	1	3	1	350	
PSLC15	15.0	16.6	31.8	10.0	1	3	1	350	
PSLC24	24.0	26.7	56.0	6.0	1	3	1	350	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'PSLC05C'.									
PSM712 Pin 3-1, 3-2 Pin 1-3, 2-3	 7.0 12.0	 7.5 13.3	 17.0 30.0	 34.0 30.0	 20 1	 75 75	 1 1	 600 600	 **SOT-23**
PSMDA05-6	5.0	6.0	18.0	17.0	20	120	5-6	350	 **SO-8**
PSMDA05C-4	5.0	6.0	19.0	30.0	100	350	4	500	 **SO-8**
PSMDA12C-4	12.0	13.3	29.0	20.0	1	150	4	500	
PSMDA15C-4	15.0	16.7	32.0	18.0	1	120	4	500	
PSMDA24C-4	24.0	26.7	45.0	13.0	1	100	4	500	
PSMDA05C-8	5.0	6.0	15.4	30.0	100	350	8	450	 **SO-14**
PSMDA12C-8	12.0	13.4	26.4	17.0	1	150	8	450	
PSMDA15C-8	15.0	16.7	32.4	14.0	1	120	8	450	
PSMDA24C-8	24.0	26.7	45.0	10.0	1	100	8	450	








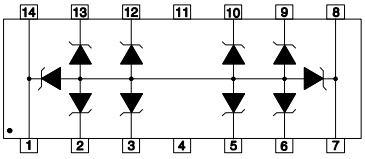
TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PSMF05	5.0	6.0	9.5	1.0	10	60	4	100	 **SC70-5L**
PSMF6.0AL	6.0	6.67	10.3	35.9	120	-	1	400	 **SOD-123FL**
Not all voltages are shown for the PSMFxxAL Series. Please consult the factory for other voltages.									
PSMF58AL	58.0	64.4	93.6	4.3	1	-	1	400	
Note: I_{PP} and P_{PP} @ 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional device, such as 'PSMF12CAL'.									
PSMS05	5.0	6.0	9.8	1.0	20	150	4-5	350	 **SOT-23-6**
PSMS12	12.0	13.3	19.0	1.0	1	80	4-5	350	
PSMS15	15.0	16.7	24.0	1.0	1	50	4-5	350	
PSMS24	24.0	26.7	40.0	1.0	1	40	4-5	350	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'PSMS05C'. PSMS05/C Series are identical to SMS05/C Series.									
PSOT03	3.3	4.0	10.9	43.0	125	500	1	500	 **SOT-23**
PSOT05	5.0	6.0	13.5	42.0	20	350	1	500	
PSOT08	8.0	8.5	16.9	34.0	10	250	1	500	
PSOT12	12.0	13.3	25.9	21.0	2	150	1	500	
PSOT15	15.0	16.7	30.0	17.0	1	100	1	500	
PSOT24	24.0	26.7	49.0	12.0	1	88	1	500	
PSOT36	36.0	40.0	76.8	9.0	1	80	1	500	
PSOT03C	3.3	4.0	10.9	43.0	125	300	1	500	 **SOT-23**
PSOT05C	5.0	6.0	13.5	42.0	20	210	1	500	
PSOT08C	8.0	8.5	16.9	34.0	10	150	1	500	
PSOT12C	12.0	13.3	25.9	21.0	2	90	1	500	
PSOT15C	15.0	16.7	30.0	17.0	1	60	1	500	
PSOT24C	24.0	26.7	49.0	12.0	1	63	1	500	
PSOT36C	36.0	40.0	76.8	9.0	1	60	1	500	
PSOT053	5.0	6.0	19.0	16.0	20	350	1	300	 **SOT-23**
PSOT123	12.0	13.3	28.0	11.0	1	150	1	300	
PSOT153	15.0	16.7	30.0	10.0	1	100	1	300	
PSOT243	24.0	26.7	50.0	6.0	1	88	1	300	
PSOT053C	5.0	6.0	19.0	16.0	20	210	1	300	
PSOT123C	12.0	13.3	28.0	11.0	1	90	1	300	
PSOT153C	15.0	16.7	30.0	10.0	1	60	1	300	
PSOT243C	24.0	26.7	50.0	6.0	1	63	1	300	
PSOT05CLP	5.0	6.0	9.8	1.0	10	210	1	300	 **SOT-23**
PSOT15KCA	12.8	14.3	33.0	9.0	0.1	120	2	300	 **SOT-23**
PSOT36KCA	33.0	36.0	66.0	6.0	0.1	45	2	300	

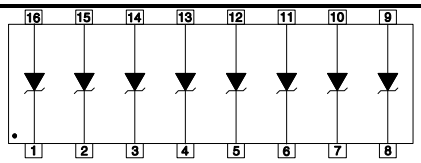
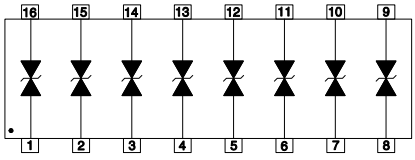
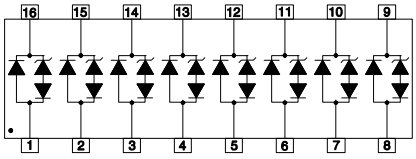
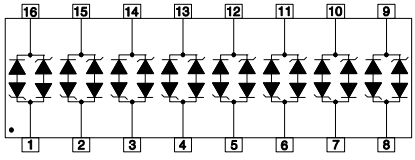




TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PSOT03LC	3.3	4.0	9.0	5.0	125	5	1	500	 **SOT-23**
PSOT05LC	5.0	6.0	11.0	5.0	20	5	1	500	
PSOT08LC	8.0	8.5	15.0	5.0	10	5	1	500	
PSOT12LC	12.0	13.3	23.0	5.0	1	5	1	500	
PSOT15LC	15.0	16.7	28.0	5.0	1	5	1	500	
PSOT24LC	24.0	26.7	46.0	5.0	1	5	1	500	
PSOT36LC	36.0	40.0	68.0	5.0	1	5	1	500	
PSOT05LCC	5.0	6.0	15.0	20.0	10	120	1-2	300	 **SOT-23**
PSOT05ULC	5.0	6.0	9.8	1.0	5	0.8	2	250	 **SOT-23**
PSSB05P	5.0	6.0	20.0	1.0	1	0.3	1	20	 **DFN-2-0402**
PTB05-8ULC	5.0	5.5	11.5	5	1	0.15	8	-	 **DFN-18**
PTVS5.0A	5.0	6.2	14.7	204	2000	-	1	3000	 **DFN2020-3**
PTVS7.5A	7.0	8.0	19.0	200	1000	-	1	3000	
PTVS10A	10.0	11.10	23.0	148	50	-	1	3000	
PTVS12A	12.0	13.30	25.2	131	50	-	1	3000	
PTVS15A	15.0	16.70	28.8	111	50	-	1	3000	
PTVS18A	18.0	20.00	32.0	97	50	-	1	3000	
PTVS24A	24.0	25.5	43.5	69	50	-	1	3000	
RSB6.8B	4.7	5.7	-	-	0.5	30	1	10	 **SOD-323**
Note: I_{PP} and P_{PP} @ 10/1000µs, Leakage Current – V_{WM} @ 3.5V									
RSB6.8G	4.7	5.7	-	-	0.5	15	1	10	 **SOD-723**
Note: I_{PP} and P_{PP} @ 10/1000µs, Leakage Current – V_{WM} @ 3.5V									









TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
RSB6.8S	4.7	5.7	-	-	0.5	30	1	10	 **SC-79**
Not: I_{PP} and P_{PP} @ 10/1000µs, Leakage Current – V_{WM} @ 3.5V									
SLVDA2.8LC	2.8	3.0	21.0	30.0	1	5	4P	600	 **SO-8**
SLVU2.8	2.8	3.0	21.0	30.0	1	2.5	1	600	 **SOT-23**
SLVU2.8-4	2.8	3.0	21.0	30.0	1	3	2P	600	 **SO-8**
SLVU2.8-4G	2.8	3.0	18.0	24.0	0.1	2	2P	600	 **SO-8**
SLVU2.8-8	2.8	3.0	17.0	30.0	1	6.0	4P	600	 **SO-8**
SLVU2.8-8G	2.8	3.0	17.0	30.0	1	3.7	4P	500	 **SO-8**
SM14M05C	5.0	6.0	17.8	47.0	100	500	8	800	 **SO-14**
SM14M08C	8.0	8.5	20.1	40.0	10	440	8	800	
SM14M12C	12.0	13.3	26.6	34.0	2	385	8	800	
SM14M15C	15.0	16.7	33.1	25.0	2	300	8	800	
SM14M24C	24.0	26.7	42.1	19.0	2	200	8	800	








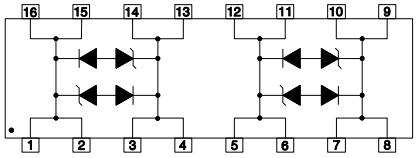
TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	PIN CONFIGURATION
SM1603	3.3	4.0	10.9	43.0	125	800	8	500	
SM1605	5.0	6.0	13.5	42.0	10	550	8	500	
SM1608	8.0	8.5	16.9	34.0	10	500	8	500	
SM1612	12.0	13.4	25.9	21.0	2	185	8	500	
SM1615	15.0	16.7	30.0	17.0	2	140	8	500	
SM1624	24.0	26.7	49.0	12.0	2	88	8	500	**SO-16**
SM1603C	3.3	4.0	10.9	43.0	125	450	8	500	
SM1605C	5.0	6.0	13.5	42.0	10	310	8	500	
SM1608C	8.0	8.5	16.9	34.0	10	280	8	500	
SM1612C	12.0	13.4	25.9	21.0	2	105	8	500	
SM1615C	15.0	16.7	30.0	17.0	2	80	8	500	
SM1624C	24.0	26.7	49.0	12.0	2	50	8	500	**SO-16**
SM16LC03	3.3	4.5	20.0	35.0	125	15	8	500	
SM16LC05	5.0	6.0	24.0	42.0	20	15	8	500	
SM16LC08	8.0	8.5	26.0	30.0	10	15	8	500	
SM16LC12	12.0	13.3	33.0	21.0	2	15	8	500	
SM16LC15	15.0	16.7	39.0	15.0	2	15	8	500	
SM16LC24	24.0	26.7	57.0	10.0	2	15	8	500	
SM16LC36	36.0	40.0	72.0	7.0	2	15	8	500	**SO-16**
SM16LC03C	3.3	4.5	20.0	35.0	125	15	8	500	
SM16LC05C	5.0	6.0	24.0	42.0	20	15	8	500	
SM16LC08C	8.0	8.5	26.0	30.0	10	15	8	500	
SM16LC12C	12.0	13.3	33.0	21.0	2	15	8	500	
SM16LC15C	15.0	16.7	39.0	15.0	2	15	8	500	
SM16LC24C	24.0	26.7	57.0	10.0	2	15	8	500	
SM16LC36C	36.0	40.0	72.0	7.0	2	15	8	500	**SO-16**
SM5S14A	14.0	15.6	23.2	155	10	-	1	3600	
Not all voltages are shown for the SM5S Series. Please consult the factory for other voltages.									
SM5S36A	36.0	40.0	58.1	62	10	-	1	3600	**DO-218AB**
Note: I_{PP} and P_{PP} @ 10/1000µs.									
SM6S14A	14.0	15.6	23.2	198	10	-	1	4600	
Not all voltages are shown for the SM6S Series. Please consult the factory for other voltages.									
SM6S36A	36.0	40.0	58.1	79	10	-	1	4600	**DO-218AB**
Note: I_{PP} and P_{PP} @ 10/1000µs.									
SM8S14A	14.0	15.6	23.2	284	10	-	1	6600	
Not all voltages are shown for the SM8S Series. Please consult the factory for other voltages.									
SM8S43A	43.0	47.8	69.4	95.1	10	-	1	6600	**DO-218AB**
Note: I_{PP} and P_{PP} @ 10/1000µs.									
SM8LC05	5.0	6.0	24.6	45.0	100	25	2P	800	
SM8LC08	8.0	8.5	25.5	40.0	10	25	2P	800	
SM8LC12	12.0	13.3	32.9	34.0	4	25	2P	800	
SM8LC15	15.0	16.7	38.5	27.0	4	25	2P	800	
SM8LC24	24.0	26.7	48.5	22.0	4	25	2P	800	**SO-8**

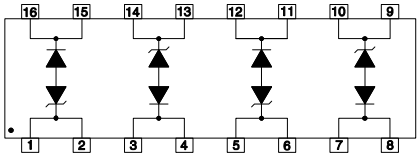
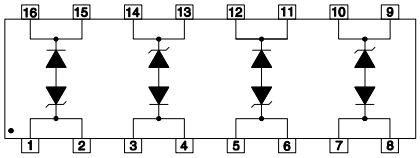




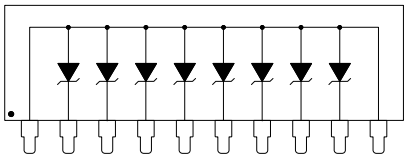
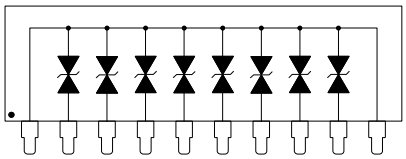
TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
SMAJ5.0	5.0	6.40	9.6	41.7	800	-	1	400	
Not all voltages are shown for the SMAJ Series. Please consult the factory for other voltages.									
SMAJ440A	440.0	492.0	713.0	0.6	5	-	1	400	**DO-214AC**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SMAJ440CA'.									
SMBJ5.0	5.0	6.40	9.6	62.5	800	-	1	600	
Not all voltages are shown for the SMBJ Series. Please consult the factory for other voltages.									
SMBJ480A	480.0	537.0	779.0	0.77	1	-	1	600	**DO-214AA**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SMBJ440CA'.									
SMCJ5.0	5.0	6.40	9.6	156	800	-	1	1500	
Not all voltages are shown for the SMCJ Series. Please consult the factory for other voltages.									
SMCJ440A	440.0	492.0	713.0	2.1	1	-	1	1500	**DO-214AB**
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SMCJ440CA'.									
SMDA03	3.3	4.0	7.0	5.0	125	800	4	500	
SMDA05	5.0	6.0	10.0	5.0	20	550	4	500	
SMDA08	8.0	8.5	14.0	5.0	10	500	4	500	
SMDA12	12.0	13.3	22.0	5.0	1	185	4	500	
SMDA15	15.0	16.7	27.0	5.0	1	140	4	500	
SMDA24	24.0	26.7	45.0	5.0	1	88	4	500	
SMDA36	36.0	40.0	65.0	5.0	1	80	4	500	**SO-8**
SMDA03C	3.3	4.5	9.0	5.0	125	450	4	500	
SMDA05C	5.0	6.0	10.0	5.0	20	308	4	500	
SMDA08C	8.0	8.5	14.0	5.0	10	300	4	500	
SMDA12C	12.0	13.3	22.0	5.0	1	105	4	500	
SMDA15C	15.0	16.7	27.0	5.0	1	80	4	500	
SMDA24C	24.0	26.7	45.0	5.0	1	50	4	500	
SMDA36C	36.0	40.0	65.0	5.0	1	45	4	500	**SO-8**
SMDA03-6	3.3	4.0	9.0	5.0	75	300	5-6	300	
SMDA05-6	5.0	6.0	11.0	5.0	20	308	5-6	300	
SMDA12-6	12.0	13.3	24.0	5.0	1	185	5-6	300	
SMDA15-6	15.0	16.7	30.0	5.0	1	140	5-6	300	
SMDA24-6	24.0	26.7	55.0	5.0	1	80	5-6	300	**SO-8**
SMDA05CM	5.0	6.0	19.0	30.0	100	350	4-7	500	
SMDA08CM	8.0	8.5	23.7	24.0	10	300	4-7	500	
SMDA12CM	12.0	13.4	29.2	20.0	1	150	4-7	500	
SMDA15CM	15.0	16.7	31.1	18.0	1	100	4-7	500	
SMDA24CM	24.0	26.7	45.0	13.0	1	63	4-7	500	**SO-8**
SMDA05CN-5	5.0	6.0	19.0	30.0	10	350	5	500	
SMDA12CN-5	12.0	13.4	29.0	20.0	1	150	5	500	
SMDA15CN-5	15.0	16.7	31.0	18.0	1	75	5	500	
SMDA24CN-5	24.0	26.7	45.0	13.0	1	63	5	500	**SO-8**

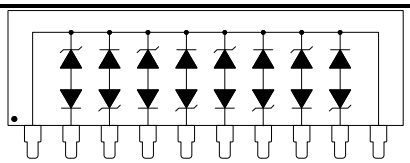
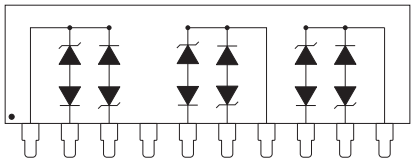

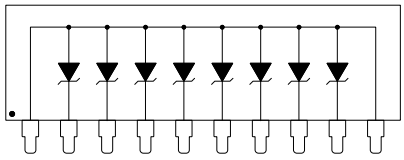
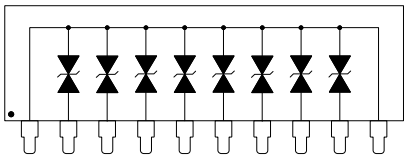
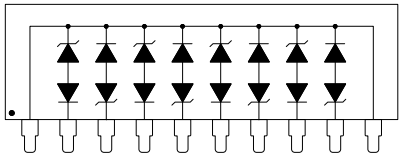
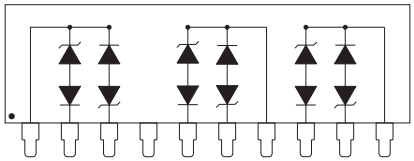
TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
SMDA03LC	3.3	4.5	10.9	43.0	125	15	4	500	 **SO-8**
SMDA05LC	5.0	6.0	13.5	42.0	20	15	4	500	
SMDA08LC	8.0	8.5	16.9	34.0	10	15	4	500	
SMDA12LC	12.0	13.3	25.9	27.0	1	15	4	500	
SMDA15LC	15.0	16.7	30.0	17.0	1	15	4	500	
SMDA24LC	24.0	26.7	49.0	12.0	1	15	4	500	
SMDA03LCC	3.3	4.5	10.9	43.0	125	15	4	500	 **SO-8**
SMDA05LCC	5.0	6.0	13.5	42.0	20	15	4	500	
SMDA08LCC	8.0	8.5	16.9	34.0	10	15	4	500	
SMDA15LCC	15.0	16.7	30.0	17.0	1	15	4	500	
SMDA24LCC	24.0	26.7	49.0	12.0	1	15	4	500	
SMDB05	5.0	6.0	24.6	45.0	25	880	4	800	 **SO-8**
SMDB08	8.0	8.5	25.5	40.0	10	800	4	800	
SMDB12	12.0	13.3	32.9	34.0	2	440	4	800	
SMDB15	15.0	16.7	38.5	27.0	2	400	4	800	
SMDB24	24.0	26.7	48.5	20.0	2	275	4	800	
SMDB05C	5.0	6.0	24.6	45.0	25	493	4	800	 **SO-8**
SMDB08C	8.0	8.5	25.5	40.0	10	450	4	800	
SMDB12C	12.0	13.3	32.9	34.0	2	248	4	800	
SMDB15C	15.0	16.7	38.5	27.0	2	225	4	800	
SMDB24C	24.0	26.7	48.5	20.0	2	155	4	800	
SMDB712C	7.0 12.0	8.5 13.3	25.5 32.9	40.0 34.0	10 2	284	1	800	 **SO-8**
SMDJ5.0	5.0	6.40	9.6	313	5000	-	1	3000	 **DO-214AB**
Not all voltages are shown for the SMDJ Series. Please consult the factory for other voltages.									
SMDJ440A	440.0	492.0	713.0	4.2	1	-	1	3000	
Note: I_{PP} and P_{PP} 10/1000µs. Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SMDJ440CA'.									
SMF05C	5.0	6.0	9.8	5.0	5	60	4-5	100	 **SC70-6L**
SMF12C	12.0	13.3	18.0	5.0	1	30	4-5	100	
SMF15C	15.0	16.7	22.0	5.0	1	25	4-5	100	
SMF24C	24.0	26.7	50.0	5.0	1	20	4-5	100	
SMLC6.5C-2	6.5	7.2	28.0	150.0	300	30	2P	3900	 **SO-16**
SMLC12C-2	12.0	13.3	35.0	140.0	2	30	2P	3900	



TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
SMP6LC05-2P	5.0	6.0	26.0	150	300	15	2P	3900	 **SO-16**
SMP6LC6.5-2P	6.5	7.2	28.0	150	300	15	2P	3900	
SMP6LC08-2P	8.0	8.6	30.0	140	25	15	2P	3900	
SMP6LC12-2P	12.0	13.3	35.0	140	2	15	2P	3900	
SMP6LC15-2P	15.0	16.7	50.0	110	2	15	2P	3900	
SMP6LC24-2P	24.0	26.7	57.0	80	2	15	2P	3900	
SMP6LLC05-2P	5.0	6.0	26.0	150.0	300	5	2P	3900	 **SO-16**
SMP6LLC6.5-2P	6.5	7.2	28.0	150.0	300	5	2P	3900	
SMP6LLC12-2P	12.0	13.3	35.0	140.0	2	5	2P	3900	
SMS05	5.0	6.0	9.8	1.0	20	150	4	350	 **SOT-23-6**
SMS12	12.0	13.3	19.0	1.0	1	80	4	350	
SMS15	15.0	16.7	24.0	1.0	1	50	4	350	
SMS24	24.0	26.7	40.0	1.0	1	40	4	350	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SMS05C'. PSMSxx/C Series are identical to SMSxx/C Series									
USB0403	3.3	4.0	19.0	20.0	125	5	1	350	 **SOT-143**
USB0405	5.0	6.0	18.3	17.0	20	5	1	350	
USB0408	8.0	8.5	18.5	17.0	10	5	1	350	
USB0412	12.0	13.3	28.6	11.0	1	5	1	350	
USB0415	15.0	16.6	31.8	10.0	1	5	1	350	
USB0424	24.0	26.7	56.0	6.0	1	5	1	350	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'USB0415C'.									
USB50803	3.3	4.5	11.0	5.0	125	3	1	500	 **SO-8**
USB50805	5.0	6.0	13.0	5.0	20	3	1	500	
USB50812	12.0	13.3	26.0	5.0	1	3	1	500	
USB50815	15.0	16.7	32.0	5.0	1	3	1	500	
USB50824	24.0	26.7	57.0	5.0	1	3	1	500	
USB50803C	3.3	4.5	11.0	5.0	125	3	1	500	 **SO-8**
USB50805C	5.0	6.0	13.0	5.0	20	3	1	500	
USB50812C	12.0	13.3	26.0	5.0	1	3	1	500	
USB50815C	15.0	16.7	32.0	5.0	1	3	1	500	
USB50824C	24.0	26.7	57.0	5.0	1	3	1	500	
VS10P05	5.0	6.0	12.5	10.0	100	880	8	800	 **10 PIN VSIP**
VS10P08	8.0	8.5	16.6	10.0	10	800	8	800	
VS10P12	12.0	13.3	22.7	10.0	1	440	8	800	
VS10P15	15.0	16.7	28.5	10.0	1	-	8	800	
VS10P24	24.0	26.7	45.6	10.0	1	-	8	800	
VS10P05C	5.0	6.0	12.5	10.0	100	500	8	800	 **10 PIN VSIP**
VS10P08C	8.0	8.5	16.6	10.0	10	-	8	800	
VS10P12C	12.0	13.3	22.7	10.0	1	-	8	800	
VS10P15C	15.0	16.7	28.5	10.0	1	-	8	800	
VS10P24C	24.0	26.7	45.6	10.0	1	275	8	800	










TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
VS10P03LC	3.3	4.5	9.0	5.0	125	15	4	300	 **10 PIN VSIP**
VS10P05LC	5.0	6.0	12.5	10.0	100	25	4	800	
VS10P08LC	8.0	8.5	16.6	10.0	10	25	4	800	
VS10P12LC	12.0	13.3	22.7	10.0	1	25	4	800	
VS10P15LC	15.0	16.7	28.5	10.0	1	25	4	800	
VS10P24LC	24.0	26.7	45.6	10.0	1	25	4	800	
VS10P05LCI	5.0	6.0	12.5	10.0	100	25	3	800	 **10 PIN VSIP**
VS10P08LCI	8.0	8.5	16.6	10.0	10	25	3	800	
VS10P12LCI	12.0	13.3	22.7	10.0	1	25	3	800	
VS10P15LCI	15.0	16.7	28.5	10.0	1	25	3	800	
VS10P24LCI	24.0	26.7	45.6	10.0	1	25	3	800	
VSB06P05LCI	5.0	6.0	16.5	36.0	300	50	2	600	 **6 PIN VSIP**
Note: I_{PP} and P_{PP} @ 10/1000µs									
VSB10P05	5.0	6.0	9.1	10.0	300	4000	8	3400	 **10 PIN VSIP**
VSB10P08	8.0	8.5	12.0	10.0	200	-	8	3400	
VSB10P12	12.0	13.3	18.8	10.0	2	-	8	3400	
VSB10P15	15.0	16.7	23.6	10.0	2	-	8	3400	
VSB10P24	24.0	26.7	37.8	10.0	2	1250	8	3400	
VSB10P28	28.0	31.1	44.0	10.0	2	-	8	3400	
VSB10P33	33.0	36.7	51.9	10.0	2	-	8	3400	
VSB10P36	36.0	40.0	56.6	10.0	2	-	8	3400	
VSB10P05C	5.0	6.0	9.1	10.0	300	2000	8	3400	 **10 PIN VSIP**
VSB10P08C	8.0	8.5	12.0	10.0	200	-	8	3400	
VSB10P12C	12.0	13.3	18.8	10.0	2	-	8	3400	
VSB10P15C	15.0	16.7	23.6	10.0	2	-	8	3400	
VSB10P24C	24.0	26.7	37.8	10.0	2	1250	8	3400	
VSB10P28C	28.0	31.1	44.0	10.0	2	-	8	3400	
VSB10P33C	33.0	36.7	51.9	10.0	2	400	8	3400	
VSB10P36C	36.0	40.0	56.6	10.0	2	-	8	3400	
VSB10P05LC	5.0	6.0	9.1	10.0	300	100	4P	3400	 **10 PIN VSIP**
VSB10P08LC	8.0	8.5	12.0	10.0	200	100	4P	3400	
VSB10P12LC	12.0	13.3	18.8	10.0	2	100	4P	3400	
VSB10P15LC	15.0	16.7	23.6	10.0	2	100	4P	3400	
VSB10P24LC	24.0	26.7	37.8	10.0	2	100	4P	3400	
VSB10P28LC	28.0	31.1	44.0	10.0	2	100	4P	3400	
VSB10P33LC	33.0	36.7	51.9	10.0	2	100	4P	3400	
VSB10P36LC	36.0	40.0	56.6	10.0	2	100	4P	3400	
VSB10P05LCI	5.0	6.0	9.1	10.0	300	100	3P	3400	 **10 PIN VSIP**
VSB10P08LCI	8.0	8.5	12.0	10.0	200	100	3P	3400	
VSB10P12LCI	12.0	13.3	18.8	10.0	2	100	3P	3400	
VSB10P15LCI	15.0	16.7	23.6	10.0	2	100	3P	3400	
VSB10P24LCI	24.0	26.7	37.8	10.0	2	100	3P	3400	
VSB10P28LCI	28.0	31.1	44.0	10.0	2	100	3P	3400	
VSB10P33LCI	33.0	36.7	51.9	10.0	2	100	3P	3400	
VSB10P36LCI	36.0	40.0	56.6	10.0	2	100	3P	3400	










TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs – A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_J - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
VSMF05LC	5.0	6.0	12.0	2.0	1	9	4	25	 **SOT-953**
Note: Also available in SOT-553 package configuration, part number MSMF05LC									
VSMF05LCC	5.0	6.0	12.0	2	1	9	4-5	25	 **SOT-963**
Note: Also available in SOT-563 package configuration, part number MSMF05LC									










STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
DSL03-24	24.0	26.0	55.0	15.0	0.1	5.0	2	500	 **SOT-23-6**
PAM04DF100524	5.0	6.0	12.0	1.0	0.5	0.7	4	150	 **DFN-10**
PAM04ST430502	5.0	6.0	20.0	10.0	1	0.6	2	200	 **SOT-543**
PAM05SC700504F	5.0	6.0	25.0	5.0	3	1.9	4	200	 **SC70-6L**
PAM13ST2305	5.0	6.0	15.0	5.0	5	3.5	4	500	 **SOT-23-6**
PAM15ST4305	5.0	6.0	20.0	28.0	5	10	2	500	 **SOT-143**
PAZC099	5.0	6.0	12.0	1.0	0.5	0.6	4	100	 **SOT-23-6**
PLC03-6	6.0	6.8	20.0	100.0	25	8	2	2K	 **SO-8**
PLC497	1.0	1.3	5.0	5.0	20	2.5	1	200	 **SOT-23**









STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PLR0502	5.0	6.0	20.0	10.0	1	0.6	2	200	 **SOT-543**
PLR0502-6	5.0	6.0	17.0	3.0	1	0.7	2	50	 **SC-89**
PLR0504F	5.0	6.0	25.0	5.0	3	1.9	4	200	 **SC70-6L**
PLR0504PLCN	5.0	6.0	15.6	16.0	0.5	1.5	4	250	 **DFN-10**
PLR0506	5.0	6.0	18.0	4.0	3	0.8	6	72	 **DFN-8**
PLR0506LP	5.0	6.0	18.0	4.0	3	0.8	6	72	 **DFN-8LP**
PLR0508	5.0	6.0	13.0	5.0	1	1.6	8	200	 **DFN-10**
PLR0514LC	5.0	6.0	12.0	1.0	1	0.6	4	-	 **DFN-10**
PLR05214LC	5.0	6.0	20.0	5.0	0.5	0.35	4	-	 **DFN-10**










STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PLR0522	5.0	6.0	16.5	4.0	0.5	0.8	2	60	 **DFN-6**
PLR0524	5.0	6.0	12.0	1.0	0.5	0.7	4	150	 **DFN-10**
PLR0524P	5.0	6.0	16.5	4.0	0.5	0.8	4	60	 **DFN-10**
PLR2210	2.5	3.3	11.5	10.0	0.05	0.6	2P	170	 **DFN-8**
PLR2504	2.5	2.0	7.5	10.0	0.5	4	4P	300	 **DFN-10**
PLR3304	3.3	3.3	10.0	10.0	0.1	4.0	4	400	 **DFN-10**
PLR3304PLCN	3.3	4.0	15.0	17.0	0.1	1.5	4	250	 **DFN-10**
PLR3343	3.3	5.6	10.0	1.0	1	0.25	4	150	 **DFN-10**
PLR4045	3.3	4.0	20.0	30.0	0.1	1.6	4	600	 **MSOP-10**



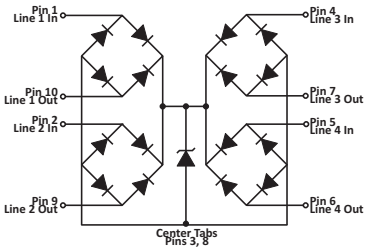
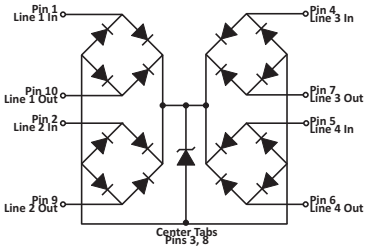
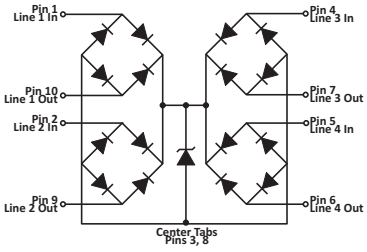
STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PSR05	5.0	6.0	20.0	28.0	5	10	2	500	 **SOT-143**
PSR05LC	5.0	6.0	20.0	28.0	5	2.5	2	500	 **SOT-143**
PSR3.3	3.3	-	15.0	10.0	1	0.6	2	150	 **SOT-143**
PSRDA3.3-4	3.3	4.0	6.5	1.0	125	5	4	500	 **SO-8**
PSRDA05-4	5.0	6.0	9.8	1.0	20	5	4	500	
PSRDA12-4	12.0	13.3	19.0	1.0	1	5	4	500	
PSRDA15-4	15.0	16.7	24.0	1.0	1	5	4	500	
PSRDA2.5-4A	2.5	3.0	5.5	1.0	0.5	5	4	500	 **SO-8**
PSRDA3.3-4A	3.3	4.0	6.5	1.0	0.5	5	4	500	
PSRDA3.3-6	3.3	4.0	6.5	1.0	125	5	6	500	 **SO-8**
PSRDA05-6	5.0	6.0	9.8	1.0	20	5	6	500	
PSRDA2.5-6A	2.5	3.6	5.5	1.0	0.5	5	6	500	 **SO-8**
PSRDA3.3-6A	3.3	4.0	6.5	1.0	0.5	5	6	500	
PSRV2.8-2LC	2.8	-	8.5	5.0	0.1	1	2	300	 **DFN-6**
PSRV3.3-2LC	3.3	3.5	15.0	10.0	0.1	1	2	300	
PSRV05-2LC	5.0	6.0	20.0	17.0	0.5	1	2	300	




STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
PUSB05UBK	5.0	6.0	15.0	5.0	5	3.5	4	500	 **SOT-23-6**
PUSB403	3.3	4.5	7.4	5.0	0.1	0.6	4	-	 **DFN-10**
PUSB6B	5.25	6.0	13.2	35.0	10	15	2	500	 **SO-8**
SR12	12.0	13.3	30.0	16.0	1	10	2	500	 **SOT-143**
SR2.8	2.8	3.0 @ 2µA	8.5	5.0	1	4.5	2	300	 **SOT-143**
SR3.3	3.3	3.3 @ 2µA	15.0	10.0	1	4.5	2	300	
SRV05-4	5.0	6.0	15.0	5.0	5	3.5	4	500	 **SOT-23-6**
SRV05-4-A	5.0	6.0	21.0	12.0	1	3.0	4	250	 **SOT-23-6**
SRV05-4LC	5.0	6.0	15.0	5.0	5	0.7	4	500	 **SOT-23-6**
SRV05-4M	5.0	6.0	14.0	5.0	5	4.5	4	400	 **SOT-23-6**



STEERING DIODE/TVS COMBO

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE $C_{J(SD)}$ - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
SRV05-4MT	5.0	6.0	14.0	5.0	5	4.5	4	400	 **SOT-23-6**
SRV2.8-4	2.8	3.0	8.5	5.0	5	3.5	4	600	 **SOT-23-6**
SRV25-4	2.5	3.0	7.4	10.0	0.5	3.5	4	800	 **DFN-10**
SRV25-4LC	2.5	3.0	7.4	10.0	0.1	1.0	4	400	 **DFN-10**
SRV3.3-4	3.3	3.9	12.5	15.0	0.5	3.5	4	800	 **DFN-10**




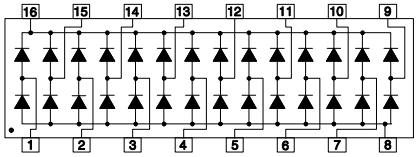




FLIP CHIP ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C @ I_{PP}	CURRENT I_{PP} @ 8/20µs - A	LEAKAGE CURRENT - µA @ V_{WM}	CAPACITANCE C_T - pF	NUMBER OF LINES	POWER @ 8/20µs - WATTS	***PIN CONFIGURATION***
P0402FC3.3C	3.3	4.0	12.5	20.0	75	150	1	250	
P0402FC05C	5.0	6.0	14.7	17.0	10	100	1	250	
P0402FC08C	8.0	8.5	19.2	13.0	10	75	1	250	
P0402FC12C	12.0	13.3	29.7	9.0	1	50	1	250	
P0402FC15C	15.0	16.7	35.7	7.0	1	40	1	250	
P0402FC24C	24.0	26.7	55.0	5.0	1	30	1	250	
P0402FC36C	36.0	40.0	84.0	3.0	1	25	1	250	**0402**
P0404FC3.3C	3.3	4.0	12.5	20.0	75	150	1-3	250	
P0404FC05C	5.0	6.0	14.7	17.0	10	100	1-3	250	
P0404FC08C	8.0	8.5	19.2	13.0	10	75	1-3	250	
P0404FC12C	12.0	13.3	29.7	9.0	1	50	1-3	250	
P0404FC15C	15.0	16.7	35.7	7.0	1	40	1-3	250	
P0404FC24C	24.0	26.7	55.0	5.0	1	30	1-3	250	
P0404FC36C	36.0	40.0	70.0	3.0	1	25	1-3	250	**0404**
Note: P040xFC Series are patented under U.S. Patent No. Des. D456,367S. Maximum Leakage current < 5µA @ 2.8V for P040xFC3.3C, <500nA @ 3.3V for P040xFC05C and < 200nA @ 5V for P040xFC08C.									
U0402FC3.3C	3.3	4.0	12.5	20.0	75	150	1	250	
U0402FC05C	5.0	6.0	14.7	17.0	10	100	1	250	
U0402FC08C	8.0	8.5	19.2	13.0	10	75	1	250	
U0402FC12C	12.0	13.3	29.7	9.0	1	50	1	250	
U0402FC15C	15.0	16.7	35.7	7.0	1	40	1	250	
U0402FC24C	24.0	26.7	55.0	5.0	1	30	1	250	
U0402FC36C	36.0	40.0	84.0	3.0	1	25	1	250	**U0402**
Note: Maximum Leakage current < 5µA @ 2.8V for U0404FC3.3C, <500nA @ 3.3V for U0402FC05C and < 200nA @ 5V for U0402FC08C.									







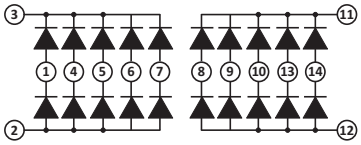



TVS/THYRISTOR COMBO

PART NUMBER	MIN. STAND-OFF VOLTAGE – V_{DRM}	MAX. SWITCHING VOLTAGE – V_S	TYP. HOLDING CURRENT – mA I_H	MIN. SWITCHING CURRENT – mA I_S	MAX .LEAKAGE CURRENT - µA @ V_{DRM}	TYP. CAPACITANCE C_J - pF	NUMBER OF LINES	***PIN CONFIGURATION***
DSL03-24T	19	29	40	10	0.01	3.0	2	 **SOT-23-6**
PSMP30-240	240	-	150	-	2	10	1	 **DO-214AC**












STEERING DIODES

PART NUMBER	REPETITIVE PEAK REV. VOLT. - V_{RRM}	FORWARD PEAK PULSE CURRENT - A	FORWARD VOLTAGE V_F @ I_F	LEAKAGE CURRENT - µA @ V_{RRM}	CAPACITANCE C_J - pF	NUMBER OF LINES	***PIN CONFIGURATION***
DALC112S1	20.0	12.0	1.3 @ 50mA	0.02 @ 18V	5	6	 **SO-8**
DSL70	50.0	27.0	1.5 @ 1A	0.005	5	2	 **SOT-143**
ET108	25.0	12.0	9 @ 12A	2	6	4	 **SO-8**
ET720	30.0	12.0	2 @ 1A	0.02 @ 20V	3	14	 **SO-16**
ET721	50.0	12.0	2 @ 1A	0.02	3	6	 **SO-8**
ET723	20.0	12.0	2 @ 1A	0.02	5	6	 **SO-8**
ET724	20.0	12.0	2 @ 1A	0.01	3	4	 **SOT-23-6**
IO6LC	30.0	3.5	0.95 @ 20mA	0.1 @ 5.5V	3	6	 **SO-8**







STEERING DIODES

PART NUMBER	REPETITIVE PEAK REV. VOLT. - V_{RRM}	FORWARD PEAK PULSE CURRENT - A	FORWARD VOLTAGE V_F @ I_F	LEAKAGE CURRENT - µA @ V_{RRM}	CAPACITANCE C_J - pF	NUMBER OF LINES	***PIN CONFIGURATION***
MAD1103	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
MAD1105	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
MAD1106	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
MAD1107	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
MAD1108	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **16 PIN DIP**
MAD1109	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	7	 **14 PIN DIP**
MMAD130	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
MMAD1103	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
MMAD1105	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
MMAD1106	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**





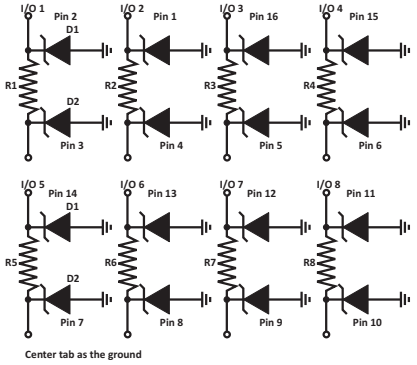


STEERING DIODES

PART NUMBER	REPETITIVE PEAK REV. VOLT. - V_{RRM}	FORWARD PEAK PULSE CURRENT - A	FORWARD VOLTAGE V_F @ I_F	LEAKAGE CURRENT - µA @ V_{RRM}	CAPACITANCE C_J - pF	NUMBER OF LINES	***PIN CONFIGURATION***
MMAD1107	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
MMAD1108	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-16**
MMAD1109	50.0	12.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
PMAD1103	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
PMAD1105	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
PMAD1106	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **14 PIN DIP**
PMAD1108	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **16 PIN DIP**
PMAD1109	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	7	 **14 PIN DIP**
PMMAD1103	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
PMMAD1106	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-14**
PMMAD1108	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	8	 **SO-16**

STEERING DIODES


PART NUMBER	REPETITIVE PEAK REV. VOLT. - V_{RRM}	FORWARD PEAK PULSE CURRENT - A	FORWARD VOLTAGE V_F @ I_F	LEAKAGE CURRENT - µA @ V_{RRM}	CAPACITANCE C_J - pF	NUMBER OF LINES	***PIN CONFIGURATION***
PMMAD1109	50.0	40.0	1.2 @ 100mA	0.1 @ 40V	5	7	 **SO-14**
PSRDA70-4	70.0	24.0	1.1 @ 100mA	5	6	4	 **SO-8**
SR70	70.0	30.0	1.5 @ 1A	1	5	2	 **SOT-143**
USB002	20.0	12.0	1.4 @ 10mA	1 @ 5V	0.6	2	 **SOT-543**
USB004	20.0	12.0	0.95 @ 20mA	1 @ 5V	6.0	2	 **SOT-143**
USB208	20.0	12.0	1.2 @ 50mA	1 @ 5V	5	4	 **SOT-23-6**

EMI FILTER/TVS DIODE ARRAYS

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$ @ 1 mA	REVERSE LEAKAGE CURRENT - µA @ V_{WM}	RESISTANCE ±20% - OHMS	CUT-OFF FREQUENCY – MHz (50 Ohm System)	CAPACITANCE C_T - pF	NUMBER OF LINES	***PIN CONFIGURATION***
EM02-100	5.0	6.0	0.1	100	110	30	2	 **SOT-563**
EM1631-08DSLP	5.0	6.0	0.1	100	110	30	8	 **DFN-16SLP**
EM4D-100L	5.0	6.0	0.1 @ 3V	100	150	20	4	 **DFN-8/LP**
EM4DLP-100L	5.0	6.0	0.1 @ 3V	100	150	20	4	
EM8D-100L	5.0	6.0	0.1 @ 3V	100	150	20	8	 **DFN-16/LP/SLP**
EM8DLP-100L	5.0	6.0	0.1 @ 3V	100	150	20	8	
EM8DSPL-100L	5.0	6.0	0.1 @ 3V	100	150	20	8	
EM8Q-100	5.0	6.0	0.1 @ 3V	100	150	20	8	 **QFN-16**
PAM24DF1605	5.0	6.0	0.1 @ 3V	100	110	30	8	 **DFN-16**
STF701	5.0	6.0	1.0 @ 3.3V	-	-	160	2	 **SC70-5L**

THYRISTORS

PART NUMBER	REPETITIVE PEAK OFF-STATE VOLTAGE – V_{DRM}	SWITCHING VOLTAGE – V_S	MINIMUM HOLDING CURRENT – mA I_H	SWITCHING CURRENT – mA I_S	MAX. OFF-STATE CURRENT - µA @ V_{DRM}	MAX. ON-STATE VOLTAGE - V_T	ON-STATE CURRENT – A I_T	CAPACITANCE C_T - pF	PIN CONFIGURATION
PP0080SA	6	25	50	800	5	4	2.2	50	
PP0300SA	25	40	50	800	5	4	2.2	60	
PP0640SA	58	77	150	800	5	4	2.2	60	
PP0720SA	65	88	150	800	5	4	2.2	60	
PP0800SA	75	98	150	800	5	4	2.2	60	
PP1100SA	90	130	150	800	5	4	2.2	60	
PP1300SA	120	160	150	800	5	4	2.2	40	
PP1500SA	140	180	150	800	5	4	2.2	40	
PP1800SA	160	220	150	800	5	4	2.2	40	
PP2300SA	190	260	150	800	5	4	2.2	30	
PP2600SA	220	300	150	800	5	4	2.2	30	
PP3100SA	275	350	150	800	5	4	2.2	30	
PP3500SA	300	400	150	800	5	4	2.2	30	
PP0080SB	6	25	50	800	5	4	2.2	60	
PP0300SB	25	40	50	800	5	4	2.2	110	
PP0640SB	58	77	150	800	5	4	2.2	60	
PP0720SB	65	88	150	800	5	4	2.2	60	
PP0800SB	75	98	150	800	5	4	2.2	60	
PP1100SB	90	130	150	800	5	4	2.2	60	
PP1300SB	120	160	150	800	5	4	2.2	40	
PP1500SB	140	180	150	800	5	4	2.2	40	
PP1800SB	160	220	150	800	5	4	2.2	40	
PP2300SB	190	260	150	800	5	4	2.2	30	
PP2600SB	220	300	150	800	5	4	2.2	30	
PP3100SB	275	350	150	800	5	4	2.2	30	
PP3500SB	300	400	150	800	5	4	2.2	30	
PP0080SC	6	25	50	800	5	4	2.2	30	
PP0300SC	25	40	50	800	5	4	2.2	60	
PP0640SC	58	77	150	800	5	4	2.2	120	
PP0720SC	65	88	150	800	5	4	2.2	120	
PP0800SC	75	98	150	800	5	4	2.2	120	
PP1100SC	90	130	150	800	5	4	2.2	120	
PP1300SC	120	160	150	800	5	4	2.2	80	
PP1500SC	140	180	150	800	5	4	2.2	80	
PP1800SC	160	220	150	800	5	4	2.2	80	
PP2300SC	190	260	150	800	5	4	2.2	60	
PP2600SC	220	300	150	800	5	4	2.2	60	
PP3100SC	275	350	150	800	5	4	2.2	60	
PP3500SC	300	400	150	800	5	4	2.2	60	






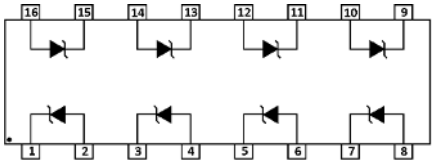
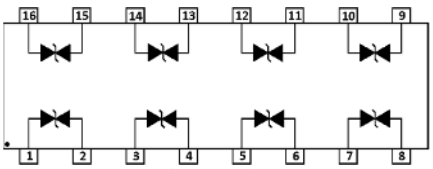
DO-214AA

SURGE RATINGS




SERIES	I_{PP} 2 X 10µs AMPS	I_{PP} 8 X 20µs AMPS	I_{PP} 10 X 160µs AMPS	I_{PP} 10 X 560µs AMPS	I_{PP} 10 X 1000µs AMPS	I_{TSM} 60 Hz AMPS	di/dt AMPS/µs (Note 1)	dv/dt V/µs (Note 1)
SA	150	150	100	50	50	20	500	2000
SB	300	300	150	100	80	32	500	2000
SC	500	400	200	200	100	60	500	2000

Note 1: Critical Rate of Rise for On-State Current (di/dt) and Off-State Voltage (dv/dt).

MODULES – COMPONENTS (NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C	CURRENT I_{PP} @10/1000µs - A	LEAKAGE CURRENT - µA @ V_{WM}	POWER @ 10/1000µs - kW	***PACKAGE***
1.5KE6.8	5.5	6.12	10.8	139.0	1000	1.5	
Not all voltages show for the 1.5KE Series. Please consult the factory for other voltages.							
1.5KE600A	513.0	570.0	828.0	1.8	1	1.5	**AXIAL LEAD**
Note: Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as '1.5KE520CA'.							
15KP17	17.0	18.9	32.3	464.0	5000	15	 **AXIAL LEAD (KPA Series)**  **THRU-HOLE (KP Series)**
Not all voltages show for the 15KP Series. Please consult the factory for other voltages.							
15KP280A	280.0	311.0	452.0	33.0	10	15	
15KPA17	17.0	18.9	32.3	464.0	5000	15	
Not all voltages show for the 15KPA Series. Please consult the factory for other voltages.							
15KPA280A	280.0	311.0	452.0	33.0	10	15	
30KPA28A	28.0	31.3	50.0	606.0	5000	30	
Not all voltages show for the 30KPA Series. Please consult the factory for other voltages.							
30KPA360A	360.0	400.0	640.0	55.0	2	30	
Note: Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as '15KP17CA'.							
2700SM28CAN	28.0	31.0	45.5	15K	800	2250	
2700SM78CAN	78.0	86.0	150.0	15K	10	2250	
5KP5.0A	5.0	6.4	9.2	543	5000	5	
Not all voltages show for the 5KP Series. Please consult the factory for other voltages.							
5KP440A	440.0	492.0	713.0	7.0	2	5	**AXIAL LEAD**
Note: Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as '5KP180CA'.							
60KS200C	180.0	200.0	335.0	180.0	10	60kW @ 1.2/50µs	
90KS200C	180.0 180.0	200.0 200.0	280.0 335.0	180.0 270.0	0.5 0.5	90kW @ 1.2/50µs	
704-15K36	31.5	36.0	53.0	300.0	100	15	 
704-15K36P	31.5	36.0	53.0	300.0	100	15	
704-15K36T	31.5	36.0	53.0	300.0	500	15	
DD3K06CA	6.0	6.67	10.3	291.3	1000	3000	
DD3K09CA	9.0	10.0	15.4	194.8	10	3000	
DD3K12CA	12.0	13.3	19.9	150.6	5	3000	
DD3K18CA	18.0	20.0	29.2	102.8	2	3000	
DD3K30A	30.0	33.3	48.4	62.0	2	3000	
DD3K40A	40.0	44.4	64.5	46.4	2	3000	**16-PIN DSIP**


MODULES – COMPONENTS (NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C	CURRENT I_{PP} @10/1000µs - A	LEAKAGE CURRENT - µA @ V_{WM}	POWER @ 10/1000µs - kW	***PACKAGE***
GPZ532	28.0	32.0	40.0	100	50	10kW @ 1ms	 
GPZ1275	28.0	32.0	55.0	500	60	30kW @ 1ms	
GPZ1275B60K	28.0	32.0	55.0	1000	60	60kw @ 1ms	
Note: I_{PP} @ 1 ms for GPZ Series.							
K1-076	54.0	83.0	135.0	-	20	-	 **AXIAL LEAD**
Not all voltages show for the K Series. Please consult the factory for other voltages.							
KD-076	54.0	85.0	145.0	-	20	-	
Note: K1, KA, KB, Kc and KD Series is available. Please consult factory for more information.							
P15KP17	17.0	18.9	32.3	464.0	5000	15	 **AXIAL LEAD**
Not all voltages show for the P15KP Series. Please consult the factory for other voltages.							
P15KP280A	280.0	311.0	452.0	33.0	10	15	
P30KP30A	30.0	33.3	55.2	543.0	5000	30	
Not all voltages show for the P30KP Series. Please consult the factory for other voltages.							
P30KP260A	260.0	289.0	416.0	72.0	10	30	
Note: Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as 'P15KP17CA'.							
P6KE6.8	5.5	6.12	10.8	55.6	1000	600	 **AXIAL LEAD**
Not all voltages show for the P6KE Series. Please consult the factory for other voltages.							
P6KE600A	513.0	570.0	828.0	0.7	1	600	
Note: Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as 'P6KE520CA'.							
PAM07DF23K24	24	26.7	43.0	69.8	3	3	 **DFN-2-3KW**
Note: ROHS Compliant.							
PAM16AL30A	30.0	33.3	50.7	296.0	15	15	 **AXIAL LEAD**
PAM25DF25K33	33.0	36.8	53.3	94.0	8	5	 **DFN-2-5KW**
PAM25DF25K36	36.0	40.2	58.1	86.0	8	5	
Note: **ROHS Compliant.**							
PDTVS58CA	58.0	64.0	110	3kA	10	-	 **2-LEAD ENCAPSULATED COMPONENT**
PDTVS76CA	76.0	85.0	140	3kA	10	-	


MODULES – COMPONENTS (NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C	CURRENT I_{PP} @10/1000µs - A	LEAKAGE CURRENT - µA @ V_{WM}	POWER @ 10/1000µs - kW	***PACKAGE***
PHP8.4	12.0	14.0	22.0	341.0	250	7.5	
PHP24	34.0	40.0	67.0	112.0	250	7.5	
PHP30	42.5	50.0	84.0	90.0	250	7.5	
PHP60	85.0	100.0	167.0	90.0	250	15	
PHP120*	170.0	200.0	319.0	47.0	250	15	
PHP208	295.0	347.0	536.0	28.0	250	15	
PHP250*	354.0	418.0	652.0	23.0	250	15	
PHP275	390.0	460.0	710.0	21.0	250	15	
PHP440	623.0	735.0	1138.0	13.2	250	15	
PHP500*	708.0	835.0	1292.0	11.6	250	15	
PIP8.4	12.0	14.0	22.0	341.0	250	7.5	
PIP24	34.0	40.0	67.0	112.0	250	7.5	
PIP30	42.5	50.0	84.0	90.0	250	7.5	
PIP60	85.0	100.0	167.0	90.0	250	15	
PIP120*	170.0	200.0	319.0	47.0	250	15	
PIP208	295.0	347.0	536.0	28.0	250	15	
PIP250*	354.0	418.0	652.0	23.0	250	15	
PIP440	623.0	735.0	1138.0	13.2	250	15	
PIP500*	708.0	835.0	1292.0	11.6	250	15	
Note: PHP Series is typically used in Aerospace applications. PIP Series is typically used in Industrial applications. *indicates marine applications.							
SM10KW10A	10.0	11.1	20.0	3000	15	8.5	
SM10KW12A	12.0	13.4	24.0	2500	8	8.5	
SM10KW15A	15.0	16.5	30.0	2000	8	8.5	
SM10KW22A	22.0	24.4	40.2	1492	8	8.5	
SM10KW24A	24.0	26.8	48.3	1242	8	8.5	
SM10KW28A	28.0	31.2	56.1	1069	8	8.5	
SM10KW30A	30.0	33.5	60.3	995	8	8.5	
SM10KW33A	33.0	36.8	66.0	909	8	8.5	
SM10KW36A	36.0	40.0	72.3	829	8	8.5	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM10KW36CA'. ROHS Compliant.							
SM10KWE10A	10.0	11.1	17.0	588	15	10	
SM10KWE12A	12.0	13.4	19.9	502	8	10	
SM10KWE22A	22.0	24.4	36.5	282	8	10	
SM10KWE24A	24.0	26.8	38.9	258	8	10	
SM10KWE28A	28.0	31.2	45.4	220	8	10	
SM10KWE30A	30.0	33.5	48.4	206	8	10	
SM10KWE33A	33.0	36.8	53.3	187	8	10	
SM10KWE36A	36.0	40.0	58.1	172	8	10	
SM10KWE48A	48.0	53.0	77.4	129	8	10	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM10KWE36CA'. ROHS Compliant							
SM15KWE24A	24.0	26.7	38.9	384	15	15	
SM15KWE30A	30.0	33.3	50.7	296	15	15	
SM15KWE36A	36.0	40.0	59.7	251	10	15	
SM15KWE48A	48.0	53.3	77.7	193	10	15	
SM15KWE70A	70.0	77.8	114.0	132.0	10	15	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM15KWE36CA'. ROHS Compliant							
SM15KPA17AN	17.0	18.9	29.3	512.0	5000	15	
Not all voltages show for the SM15KPAxxAN/CAN Series. Please consult the factory for other voltages.							
SM15KPA480AN	480.0	528.0	791.0	18.9	10	15	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM15KPA85CAN'.							
SM30KPA28AN	28.0	31.3	50.0	606.0	5000	30	
Not all voltages show for the SM30KPAxxAN/CAN Series. Please consult the factory for other voltages.							
SM30KPA480AN	480.0	528.0	791.0	37.8	2	30	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM30KPA28CAN'.							







DFN-2-KW




DFN-2-KW




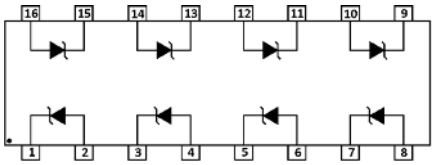
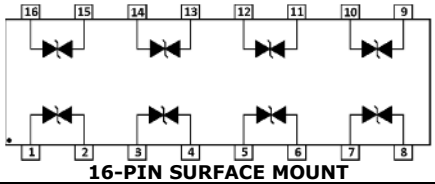


DFN-2-KW













MODULES – COMPONENTS (NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	MIN. BREAKDOWN VOLTAGE – $V_{(BR)}$	CLAMPING VOLTAGE - V_C	CURRENT I_{PP} @10/1000µs - A	LEAKAGE CURRENT - µA @ V_{WM}	POWER @ 10/1000µs - kW	***PACKAGE***
SM45KPA70AN	70.0	77.8	120.0	375.0	2	45	
Not all voltages show for the SM45KPAxxAN/CAN Series. Please consult the factory for other voltages.							
SM45KPA200AN	200.0	222.0	350.0	128.0	2	45	
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM45KPA70CAN'.							
SM3KW08A	8	8.8	13.6	220	50	3	
SM3KW24A	24	26.7	43.0	69.8	3	3	
SM3KW33A	33	36.7	56.3	53.3	3	3	**DFN-2-KW**
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM3KW33CA'. ROHS Compliant.							
SM5KW10A	10	11.1	17.0	296.0	15	5	
SM5KW33A	33.0	36.8	53.3	94.0	8	5	
SM5KW36A	36.0	40.2	58.1	86.0	8	5	DFN-2-KW
Note: Part numbers shown are unidirectional. Add a "C" suffix to specify bidirectional devices, such as 'SM5KW33CA'. ROHS Compliant.							
SMDD3K06CA	6.0	6.67	10.3	291.3	1000	3000	
SMDD3K09CA	9.0	10.0	15.4	194.8	10	3000	
SMDD3K12CA	12.0	13.3	19.9	150.6	5	3000	
SMDD3K18CA	18.0	20.0	29.2	102.8	2	3000	
SMDD3K30A	30.0	33.3	48.4	62.0	2	3000	
SMDD3K40A	40.0	44.4	64.5	46.4	2	3000	**16-PIN SURFACE MOUNT**

MODULES – SURGEBUSTERS™(NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	CLAMPING VOLTAGE - V_C @ 8/20µS	MAX. CURRENT @8/20µs – kA/Line	LEAKAGE CURRENT - µA @ V_{WM}	SERIES RESISTANCE OHMS	CAPACITANCE pF	PACKAGE
232B	±25	40.0 @ 500A	10	5	12	2000	 
232E	±25	40.0 @ 500A	10	5	12	2000	
Note: Lines of protection: 2 pair.							
420E212	±12.0	22.0 @ 2kA	10	5	12	6000	
420E225	±25.0	44.0 @ 2kA	10	5	12	3000	
420E228	±28.0	46.0 @ 2kA	10	5	12	2800	
420E236	±36.0	60.0 @ 2kA	10	5	12	1500	
420E250	±50.0	80.0 @ 2kA	10	5	12	1200	
420E260	±60.0	95.0 @ 2kA	10	5	12	1000	
Note: Lines of protection: 1 pair.							
420LB28	±28.0	40.0 @ 2kA	10	5	12	2800	 
420LB35	±35.0	60.0 @ 2kA	10	5	12	1500	
420LB60	±60.0	85.0 @ 2kA	10	5	12	1000	
420LE28	±28.0	40.0 @ 2kA	10	5	12	2800	
420LE35	±35.0	60.0 @ 2kA	10	5	12	1500	
420LE60	±60.0	85.0 @ 2kA	10	5	12	1000	
Note: Lines of protection: 2 pair.							
422B	±12.0	24.0 @ 500A	10	5	12	5000	
422E	±12.0	24.0 @ 500A	10	5	12	5000	
Note: Lines of protection: 2 pair.							
422ELC	±12.0	30.0 @ 500A	10	1	12	25	
485ELC	±7.0	20.0 @ 500A	10	10	12	25	
Note: Lines of protection: 2 pair.							
587B051	130.0 AC	350.0	3	1mA	-	-	 **LP & LPE** 
587B151	130.0 AC	350.0	3	1mA	-	-	
587B201	130.0 AC	350.0	3	1mA	-	-	
587B301	130.0 AC	350.0	3	1mA	-	-	
Note: Maximum Line Current: 5A, 15A, 20A, 30. Line to Neutral.							
587B062	240.0 AC	800.0	3	1mA	-	-	
587B162	240.0 AC	800.0	3	1mA	-	-	
587B302	240.0 AC	800.0	3	1mA	-	-	
Note: Maximum Line Current: 6A, 16A, 30A. Line to Neutral.							
587B051LP	120.0 AC	330.0	3	1mA	-	-	
587B101LP	120.0 AC	330.0	3	1mA	-	-	
587B151LP	120.0 AC	330.0	3	1mA	-	-	
587B301LP	120.0 AC	330.0	3	1mA	-	-	
Note: Maximum Line Current: 5A, 10A, 15A, 30A. Line to Neutral.							
587B062LP	240.0 AC	800.0	3	1mA	-	-	
587B102LP	240.0 AC	800.0	3	1mA	-	-	
587B162LP	240.0 AC	800.0	3	1mA	-	-	
587B302LP	240.0 AC	800.0	3	1mA	-	-	
Note: Maximum Line Current: 6A, 10A, 16A, 30A. Line to Neutral.							
587B062LPE	240.0 AC	800.0	3	1mA	-	-	
587B102LPE	240.0 AC	800.0	3	1mA	-	-	
587B162LPE	240.0 AC	800.0	3	1mA	-	-	
587B302LPE	240.0AC	800.0	3	1mA	-	-	
Note: Maximum Line Current: 6A, 10A, 16A, 30A. Line to Neutral.							
PBSP-120-10K	120	660	10	-	-	1500	
PBSP-220-10K	220	1350	10	-	-	750	
PBSP-240-10K	240	1355	10	-	-	740	
PBSP-277-10K	277	1400	10	-	-	720	
PBSP-380-10K	380	1680	10	-	-	600	
PBSP-120-20K	120	650	20	-	-	3000	
PBSP-220-20K	220	1350	20	-	-	1500	
PBSP-240-20K	240	1355	20	-	-	1480	
PBSP-277-20K	277	1500	20	-	-	1400	

MODULES – SURGEBUSTERS™(NOT ROHS COMPLIANT)

PART NUMBER	STAND-OFF VOLTAGE - V_{WM}	CLAMPING VOLTAGE - V_C @ 8/20µS	MAX. CURRENT @8/20µs – kA/Line	LEAKAGE CURRENT - µA @ V_{WM}	SERIES RESISTANCE OHMS	CAPACITANCE pF	***PACKAGE***	
TEL50B	±50.0	95.0 @ 500A	10	5	12	800		
TEL50E	±50.0	95.0 @ 500A	10	5	12	800		
TEL185B	±185.0	330.0 @ 500A	10	5	12	800		
TEL185E	±185.0	330.0 @ 500A	10	5	12	800		

Note: Lines of protection: 2 pair.

OVERCURRENT PROTECTION: FUSES

PART NUMBER	CURRENT RATING Amps	VOLTAGE RATING Volts DC	INTERRUPTING RATING Amps DC	TYPICAL RESISTANCE Ohms	TYPICAL MELT I^2t DC(A^2s)	AMPERE RATING	%OF AMP RATING	PACKAGE
PF0402F200	0.200	24	35	4.300	0.0008	200mA-4A	100/250	0402
PF0402F250	0.250	24	35	3.20	0.0011	200mA-4A	100/250	0402
PF0402F375	0.350	24	35	1.140	0.0021	200mA-4A	100/250	0402
PF0402F500	0.500	24	35	1.20	0.0043	200mA-4A	100/250	0402
PF0402F750	0.750	24	35	0.520	0.0110	200mA-4A	100/250	0402
PF0402F1	1.00	24	35	0.090	0.049	200mA-4A	100/250	0402
PF0402F1.25	1.25	24	35	0.075	0.052	200mA-4A	100/250	0402
PF0402F1.5	1.50	24	35	0.058	0.076	200mA-4A	100/250	0402
PF0402F1.75	1.75	24	35	0.045	0.13	200mA-4A	100/250	0402
PF0402F2	2.00	24	35	0.035	0.18	200mA-4A	100/250	0402
PF0402F2.5	2.50	24	35	0.025	0.23	200mA-4A	100/250	0402
PF0402F3	3.00	24	35	0.019	0.33	200mA-4A	100/250	0402
PF0402F3.5	3.50	24	35	0.018	0.45	200mA-4A	100/250	0402
PF0402F4	4.00	24	35	0.014	0.65	200mA-4A	100/250	0402
Note: Opening Time – 4 Hours Minimum, 5 seconds Maximum.								
PF0603F250	0.250	32	50	5.1	0.0004	250mA-6A	100/250	0603
PF0603F375	0.375	32	50	2.4	0.0009	250mA-6A	100/250	0603
PF0603F500	0.500	32	50	1.1	0.0018	250mA-6A	100/250	0603
PF0603F750	0.750	32	50	0.7	0.0070	250mA-6A	100/250	0603
PF0603F1	1.00	32	50	0.23	0.015	250mA-6A	100/250	0603
PF0603F1.25	1.25	32	50	0.165	0.022	250mA-6A	100/250	0603
PF0603F1.5	1.50	32	50	0.125	0.032	250mA-6A	100/250	0603
PF0603F1.75	1.75	32	50	0.08	0.048	250mA-6A	100/250	0603
PF0603F2	2.00	32	50	0.063	0.052	250mA-6A	100/250	0603
PF0603F2.5	2.50	32	50	0.04	0.061	250mA-6A	100/250	0603
PF0603F3	3.00	32	50	0.028	0.070	250mA-6A	100/250	0603
PF0603F3.5	3.50	32	50	0.022	0.122	250mA-6A	100/250	0603
PF0603F4	4.00	32	50	0.018	0.220	250mA-6A	100/250	0603
PF0603F5	5.00	32	50	0.011	0.680	250mA-6A	100/250	0603
PF0603F6	6.00	32	50	0.008	0.920	250mA-6A	100/250	0603
Note: Opening Time – 4 Hours Minimum, 5 seconds Maximum.								
PF0603H1	1.00	32	35	0.24	0.09	1A-5A	100/200/1000	0603
PF0603H1.5	1.50	32	35	0.12	0.18	1A-5A	100/200/1000	0603
PF0603H2	2.00	32	35	0.068	0.29	1A-5A	100/200/1000	0603
PF0603H2.5	2.50	32	35	0.048	0.59	1A-5A	100/200/1000	0603
PF0603H3	3.00	32	35	0.034	0.83	1A-5A	100/200/1000	0603
PF0603H3.5	3.50	32	35	0.023	1.23	1A-5A	100/200/1000	0603
PF0603H4	4.00	32	35	0.02	2.22	1A-5A	100/200/1000	0603
PF0603H4.5	4.5	32	35	0.016	2.70	1A-5A	100/200/1000	0603
PF0603H5	5.00	32	35	0.013	3.20	1A-5A	100/200/1000	0603
Note: Opening Time – 4 Hours Minimum, 1~60 seconds, 0.0002~0.02 seconds.								

OVERCURRENT PROTECTION: FUSES

PART NUMBER	CURRENT RATING Amps	VOLTAGE RATING Volts DC	INTERRUPTING RATING Amps DC	TYPICAL RESISTANCE Ohms	TYPICAL MELT I^2t DC(A^2s)	AMPERE RATING	%OF AMP RATING	PACKAGE
PF0603S1	1.00	32	35	0.25	0.09	1A-5A	100/200/300/800	0603
PF0603S1.5	1.50	32	35	0.13	0.19	1A-5A	100/200/300/800	0603
PF0603S2	2.00	32	35	0.07	0.30	1A-5A	100/200/300/800	0603
PF0603S2.5	2.50	32	35	0.05	0.61	1A-5A	100/200/300/800	0603
PF0603S3	3.00	32	35	0.035	0.83	1A-5A	100/200/300/800	0603
PF0603S3.5	3.50	32	35	0.024	1.23	1A-5A	100/200/300/800	0603
PF0603S4	4.00	32	35	0.02	2.22	1A-5A	100/200/300/800	0603
PF0603S4.5	4.50	32	35	0.016	2.74	1A-5A	100/200/300/800	0603
PF0603S5	5.00	32	35	0.013	3.40	1A-5A	100/200/300/800	0603
Note: Opening Time – 4 Hours Minimum, 1~120 seconds, 0.1~3 seconds, 0.001~0.05 seconds. Ceramic and glass package.								
PF1206F250	0.250	63	50	4.10	0.0004	250mA-8A	100/250	1206
PF1206F375	0.375	63	50	2.21	0.0008	250mA-8A	100/250	1206
PF1206F500	0.500	63	50	1.50	0.0018	250mA-8A	100/250	1206
PF1206F750	0.750	63	50	0.60	0.0055	250mA-8A	100/250	1206
PF1206F1	1.00	63	50	0.26	0.030	250mA-8A	100/250	1206
PF1206F1.25	1.25	63	50	0.24	0.046	250mA-8A	100/250	1206
PF1206F1.5	1.50	63	50	0.12	0.083	250mA-8A	100/250	1206
PF1206F1.75	1.75	63	50	0.10	0.090	250mA-8A	100/250	1206
PF1206F2	2.00	63	50	0.072	0.110	250mA-8A	100/250	1206
PF1206F2.5	2.50	63	50	0.051	0.240	250mA-8A	100/250	1206
PF1206F3	3.00	63	50	0.038	0.255	250mA-8A	100/250	1206
PF1206F3.5	3.50	32	50	0.025	0.280	250mA-8A	100/250	1206
PF1206F4	4.00	32	50	0.020	0.305	250mA-8A	100/250	1206
PF1206F4.5	4.50	32	50	0.017	0.395	250mA-8A	100/250	1206
PF1206F5	5.00	32	50	0.016	0.500	250mA-8A	100/250	1206
PF1206F6	6.00	32	50	0.012	2.064	250mA-8A	100/250	1206
PF1206F7	7.00	32	50	0.010	2.720	250mA-8A	100/250	1206
PF1206F8	8.00	32	50	0.008	4.630	250mA-8A	100/250	1206
Note: Opening Time – 4 Hours Minimum, 5 seconds Maximum. Ceramic and glass package.								
PF1206H1	1.00	63	50	0.41	0.10	1A-7A	100/200/1000	1206
PF1206H1.25	1.25	63	50	0.25	0.22	1A-7A	100/200/1000	1206
PF1206H1.5	1.50	63	50	0.20	0.26	1A-7A	100/200/1000	1206
PF1206H2	2.00	63	50	0.13	0.67	1A-7A	100/200/1000	1206
PF1206H2.5	2.50	32	50	0.081	0.97	1A-7A	100/200/1000	1206
PF1206H3	3.00	32	50	0.052	1.20	1A-7A	100/200/1000	1206
PF1206H3.5	3.50	32	50	0.040	1.64	1A-7A	100/200/1000	1206
PF1206H4	4.00	32	50	0.03	2.43	1A-7A	100/200/1000	1206
PF1206H4.5	4.50	32	50	0.025	3.50	1A-7A	100/200/1000	1206
PF1206H5	5.00	32	50	0.02	5.45	1A-7A	100/200/1000	1206
PF1206H5.5	5.50	24	60	0.016	6.20	1A-7A	100/200/1000	1206
PF1206H6	6.00	24	60	0.013	8.10	1A-7A	100/200/1000	1206
PF1206H7	7.00	24	60	0.012	9.88	1A-7A	100/200/1000	1206
Note: Opening Time – 4 Hours Minimum, 1~60 seconds, 0.0002~0.02 seconds. Ceramic and glass package.								

OVERCURRENT PROTECTION: FUSES

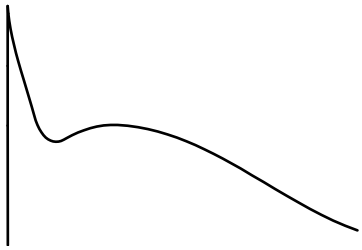

PART NUMBER	CURRENT RATING Amps	VOLTAGE RATING Volts DC	INTERRUPTING RATING Amps DC	TYPICAL RESISTANCE Ohms	TYPICAL MELT I^2t DC(A^2s)	AMPERE RATING	%OF AMP RATING	PACKAGE
PF1206S1	1.00	63	50	0.42	0.10	1A-7A	100/200/300/800	1206
PF1206S1.25	1.25	63	50	0.25	0.22	1A-7A	100/200/300/800	1206
PF1206S1.5	1.50	63	50	0.21	0.25	1A-7A	100/200/300/800	1206
PF1206S2	2.00	63	50	0.13	0.59	1A-7A	100/200/300/800	1206
PF1206S2.5	2.50	32	50	0.08	0.88	1A-7A	100/200/300/800	1206
PF1206S3	3.00	32	50	0.05	1.10	1A-7A	100/200/300/800	1206
PF1206S3.5	3.50	32	50	0.036	1.55	1A-7A	100/200/300/800	1206
PF1206S4	4.00	32	50	0.03	2.30	1A-7A	100/200/300/800	1206
PF1206S4.5	4.50	32	50	0.025	3.55	1A-7A	100/200/300/800	1206
PF1206S5	5.00	32	50	0.02	5.40	1A-7A	100/200/300/800	1206
PF1206S5.5	5.50	24	60	0.016	6.20	1A-7A	100/200/300/800	1206
PF1206S6	6.00	24	60	0.013	8.10	1A-7A	100/200/300/800	1206
PF1206S7	7.00	24	60	0.012	9.88	1A-7A	100/200/300/800	1206
Note: Opening Time – 4 Hours Minimum, 1~120 seconds, 0.1~3 seconds, 0.001~0.05 seconds. Ceramic and glass package.								

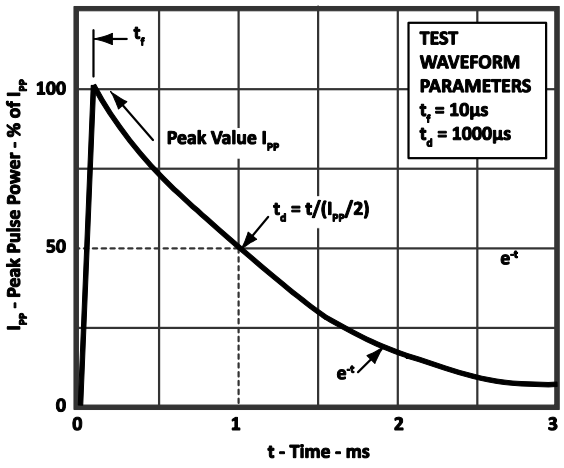
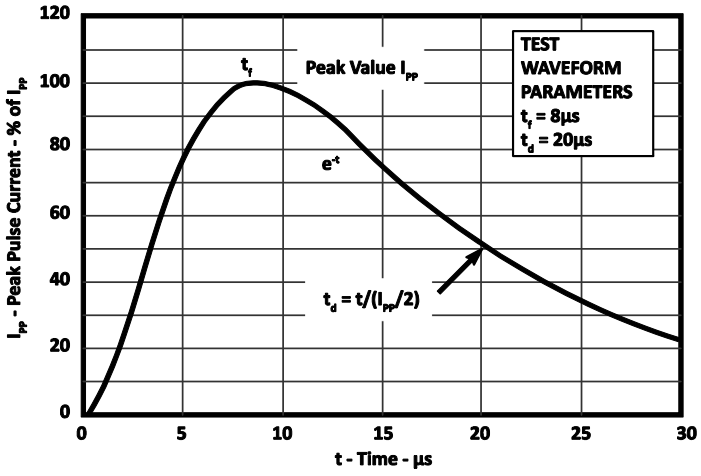
OVERCURRENT PROTECTION: POLYMER PTC DEVICES

PART NUMBER	MAX. HOLDING CURRENT – I_H Amps	MIN. TRIP CURRENT - I_T Amps	MAX. INTERRUPT VOLTAGE – VM_{AX} Volts	MAX. FAULT CURRENT – I_{MAX} Amps	MAX. TIME-TO-TRIP T_{TRIP} Amps @ Secs	TYPICAL POWER DISSIPATION – P_D Watts	MAX. RESISTANCE – R_{MAX} Ohms	PACKAGE
PMPS012-E-1206	0.125	0.37	30	100	1.0A @ 0.20s	0.60	6.00	1206
Note: Consult factory for other voltages in the PMPS-E-1206 Series								
PMPS370-E-1206	3.70	7.40	6	50	18.5A @ 2.00s	1.0	0.014	1206
PMPS020-FH-1206	0.20	0.40	30	100	8.0A @ 0.10s	0.60	0.600	1206
PMPS075-1812	0.75	1.50	24	100	8.0A @ 0.20s	0.60	0.350	1812
PMPS150-1812	1.50	3.00	24	20	8.0A @ 1.50s	0.80	0.110	1812
PMPS150E-1206	1.50	3.00	8	100	8.0A @ 0.30s	0.80	0.120	1206
PMPS200-1812	2.00	3.50	8	100	8.0A @ 2.00s	0.80	0.070	1812
PMPS200D-1210	2.00	4.00	6	50	8.0A @ 5.00s	1.2	0.028	1210
PMPS260C-1812	2.60	5.00	8	100	8.0A @ 4.00s	0.8	0.040	1812
PMPS380E-1206	3.80	7.60	6	50	16.0A @ 5.00s	1.2	0.015	1206

OVERCURRENT PROTECTION: POLYMER PTC DEVICES

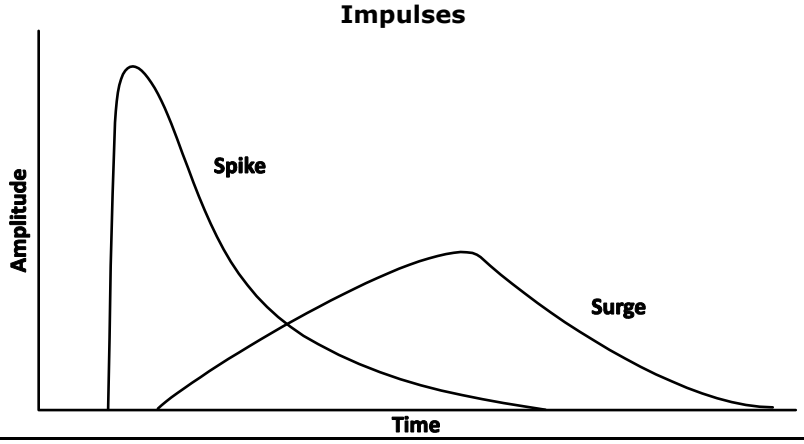
PART NUMBER	HOLDING CURRENT – I_H Amps	TRIP CURRENT - I_T Amps	OPERATING VOLTAGE - V_{DC} Volts	INTERRUPT CURRENT – I_{MAX} Amps	MAX. TIME-TO-TRIP @ $5I_HA$ - T_{TRIP} Seconds	MAX. POWER DISSIPATION – P_D Watts	TYPICAL RESISTANCE – R Ohms	PACKAGE
PLRO1206-300	3.0	6.0	6	50	4.0	1.0	0.008	1206
PLRO1206-380	3.0	8.0	6	50	4.0	1.0	0.006	1206
PLRO1210-190	1.9	4.9	6	50	4.0	1.0	0.013	1210
PLRO1210-300	3.0	8.0	6	50	4.0	1.0	0.009	1210
PLRO1210-300	3.8	9.0	6	50	4.0	1.0	0.008	1210

International Standard	Environmental Threat	Transient Characteristics	Test Waveform
61000-4-2	ESD	Super Fast < 1ns Low Energy	
61000-4-4	EFT	Fast 5 ns Medium Energy (per burst)	
61000-4-5	Surge	Surge 10-700 µs High Energy	

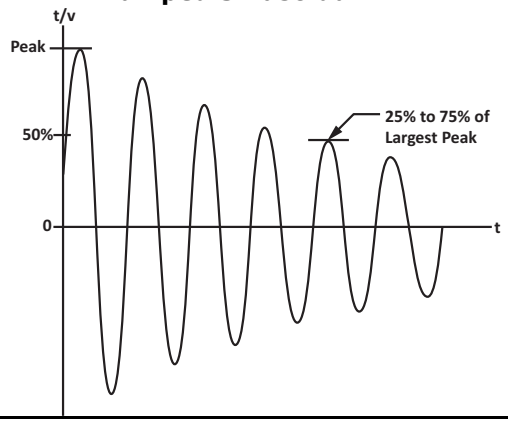
10/1000µs Waveform	8/20µs Waveform
	

IMPULSE WAVE FORMS – UNIVERSAL WAVESHAPES

Impulses

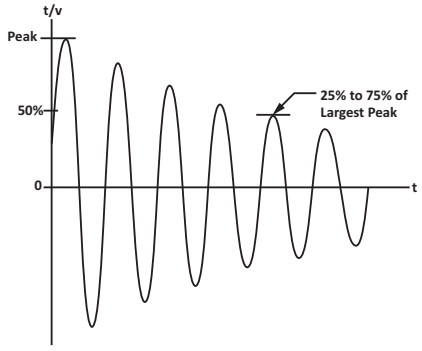


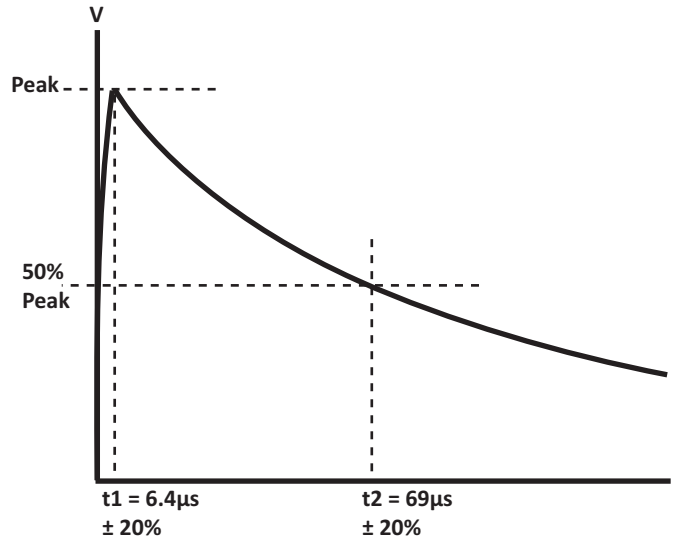
Damped Sinusoidal

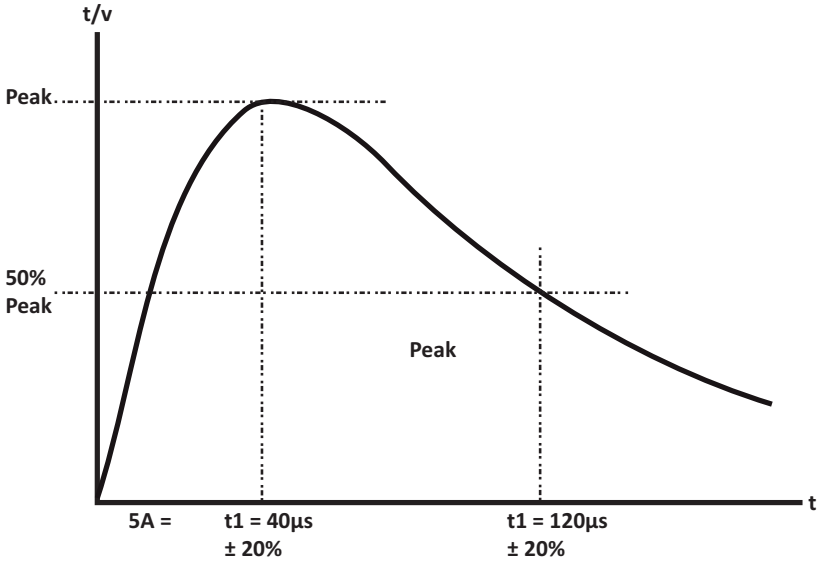


Peak Pulse Current (Amplitude)	$I_t = I_{PP}$ = 10, 100, 1000 Amp
Pulse Duration (Time) – Spike	t_d = 30ns (ESD)
Pulse Duration (Time) – Transient	t_d = 20 or 1000µs (Lightning)
Pulse Duration (Time) – Surge	t_d = 100ms (Switching)

WAVEFORM 3a PIN INJECTION – 1MHz (±20%)(800kHz – 1200kHz Damped Sine Wave)

Level	V. Test (pk) in V	I Limit (pk) in A	DO-160G Waveform
1	107	4	
2	268	10	
3	655	24	
4	1620	60	
5	3450	128	

WAVEFORM 4 PIN INJECTION – 6.4µs/69.0µs (±20%)(5.12µs - 7.68µ)(55.2µs - 82.8µs)			
Level	**Open Circuit Voltage in V**	**Short Circuit Current in A**	**DO-160G Waveform**
1	53	10	
3	314	60	
5	1690	320	

WAVEFORM 5a PIN INJECTION – 40.0µs/120.0µs (±20%)(32.0µs – 48.0µs)(96.0µs – 144.0µs)			
Level	**Open Circuit Voltage in V**	**Short Circuit Current in A**	**DO-160G Waveform**
1	52	53	
2	128.4	136	
3	304	326	
4	758	800	
5	1630	1752	

PRODUCT PACKAGING
Nominal: Scaled 1”-1”



0402/U0402
Width: 0.019” (0.48)
Length: 0.039” (1.00)
Height: 0.016” (0.41)
LD Pitch: N/A
Pad Count: 2



0404
Width: 0.039” (1.00)
Length: 0.039” (1.00)
Height: 0.016” (0.41)
LD Pitch: N/A
Pad Count: 4



0406
Width: 0.039” (1.00)
Length:0.059” (1.50)
Height: 0.016” (0.41)
LD Pitch: N/A
Pad Count: 6



0408/U0408
Width: 0.039” (1.00)
Length:0.079” (2.00)
Height: 0.016” (0.41)
LD Pitch: N/A
Pad Count: 8



5 Bump FC
Width: 0.038” (0.97)
Length:0.052” (1.32)
Height: 0.016” (0.41)
LD Pitch: N/A
Pad Count: 5



C0201
Width: 0.012” (0.30)
Length: 0.024” (0.60)
Height: 0.013” (0.33)
LD Pitch: N/A
Pad Count: 2



C0402
Width: 0.022” (0.55)
Length: 0.041” (1.05)
Height: 0.014” (0.36)
LD Pitch: N/A
Pad Count: 2



CDIP-16
Width: 0.47” (11.94)
Length:0.90” (22.86)
Height: 0.192” (4.83)
LD Pitch: 0.100” (2.54)
Pin Count: 16



CG0402
Width: 0.039” (1.00)
Length: 0.039” (0.52)
Height: 0.014” (0.35)
LD Pitch: N/A
Pad Count: 2



CG0603
Width: 0.063” (1.60)
Length: 0.031” (0.80)
Height: 0.014” (0.35)
LD Pitch: N/A
Pad Count: 2



CG1206
Width: 0.126” (3.20)
Length: 0.063” (1.60)
Height: 0.022” (0.55)
LD Pitch: N/A
Pad Count: 2



Chip Scale 0406
Width: 0.040” (1.02)
Length:0.060” (1.52)
Height: 0.009” (0.23)
LD Pitch: N/A
Pad Count: 6



DFN-2-0201(0603)
Width: 0.012” (0.30)
Length: 0.025” (0.64)
Height: 0.012” (0.30)
LD Pitch: N/A
Pad Count: 2



DFN-2-0402
Width: 0.024” (0.61)
Length: 0.040” (1.02)
Height: 0.018” (0.46)
LD Pitch: N/A
Pad Count: 2



DFN-2-3KW
Width: 0.22” (5.59)
Length: 0.25” (6.35)
Height: 0.05” (1.27)
LD Pitch: 0.168”(4.27)
Pad Count: 2



DFN-2-5KW
Width: 0.25” (6.35)
Length: 0.30” (7.62)
Height: 0.05” (1.27)
LD Pitch: 0.189”(4.80)
Pad Count: 2



DFN-4
Width: 0.040” (1.02)
Length: 0.040” (1.02)
Height: 0.020” (0.50)
LD Pitch: N/A
Pad Count: 4



DFN-6
Width: 0.059” (1.50)
Length: 0.077” (1.96)
Height: 0.019” (0.48)
LD Pitch: 0.020” (0.50)
Pad Count: 6



DFN-8
Width: 0.079” (2.00)
Length: 0.079” (2.00)
Height: 0.031” (0.80)
LD Pitch: 0.020” (0.50)
Pad Count: 8



DFN-8LP
Width: 0.063” (1.60)
Length:0.079” (2.00)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pad Count: 8



DFN-10
Width: 0.101” (2.57)
Length: 0.101” (2.57)
Height: 0.019” (0.48)
LD Pitch: 0.020” (0.50)
Pad Count: 10



DFN-12
Width: 0.063” (1.60)
Length:0.118” (3.00)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pad Count: 12



DFN-16
Width: 0.063” (1.60)
Length:0.158” (4.00)
Height: 0.031” (0.79)
LD Pitch: 0.020” (0.50)
Pad Count: 16



DFN-16LP
Width: 0.063” (1.60)
Length:0.158” (4.00)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pad Count: 16



DFN-16SLP
Width:0.051” (1.30)
Length: 0.158” (3.30)
Height: 0.021” (0.53)
LD Pitch: 0.020” (0.50)
Pad Count: 16

PRODUCT PACKAGING
SCALED 1”-1”
Nominal



DIP-8
Width: 0.250” (6.35)
Length:0.39” (9.91)
Height: 0.160” (4.06)
LD Pitch: 0.100” (2.54)
Pin Count: 8



DIP-14
Width: 0.250” (6.35)
Length:0.740” (18.80)
Height: 0.160” (4.06)
LD Pitch: 0.100” (2.54)
Pin Count: 14



DIP-16
Width: 0.250” (6.35)
Length:0.755” (19.18)
Height: 0.160” (4.06)
LD Pitch: 0.100” (2.54)
Pin Count: 16




DO-214AA
Width: 0.17” (4.32)
Length:0.14” (3.56)
Height: 0.089” (2.25)
LD Pitch: N/A
Pin Count: 2



DO-214AB
Width: 0.27” (6.86)
Length:0.23” (5.84)
Height: 0.089” (2.25)
LD Pitch: N/A
Pin Count: 2



DO-214AC
Width: 0.17” (4.32)
Length:0.10” (2.54)
Height: 0.08” (2.03)
LD Pitch: N/A
Pin Count: 2



DO-218
Width: 0.40” (10.00)
Length:0.60” (15.50)
Height: 0.19” (5.0)
LD Pitch: N/A
Pin Count: 1



E0503
Width: 0.030” (0.76)
Length: 0.050” (1.27)
Height: 0.030” (0.76)
LD Pitch: N/A
Pad Count: 2



P1206
Width:0.13” (3.20)
Length: 0.065” (1.65)
Height: 0.04” (1.0)
LD Pitch: N/A
Pad Count: 2



P1210
Width:0.13” (3.20)
Length: 0.10” (2.54)
Height: 0.02” (0.51)
LD Pitch: N/A
Pad Count: 2



P1812
Width:0.18” (4.57)
Length: 0.11” (2.79)
Height: 0.035” (0.89)
LD Pitch: N/A
Pad Count: 2



QFN-16
Width: 0.118” (3.00)
Length: 0.118” (3.00)
Height: 0.030” (0.76)
LD Pitch: 0.020” (0.50)
Pad Count: 16



SC-70-5L
Width: 0.050” (1.27)
Length:0.079” (2.00)
Height: 0.035” (0.89)
LD Pitch: 0.025” (0.64)
Pin Count: 5



SC-70-6L
Width: 0.050” (1.27)
Length:0.079” (2.00)
Height: 0.035” (0.89)
LD Pitch: 0.025” (0.64)
Pin Count: 6



SC-79
Width: 0.032” (0.81)
Length: 0.046” (1.17)
Height: 0.024” (0.61)
LD Pitch: N/A
Pin Count: 2




SC-89
Width: 0.047” (1.19)
Length:0.063” (1.60)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pin Count: 6




SO-8
Width: 0.192” (4.90)
Length: 0.15” (3.81)
Height: 0.061” (1.55)
LD Pitch: 0.050” (1.270
Pin Count: 8



SO-14
Width: 0.15” (3.81)
Length:0.34” (8.63)
Height: 0.061” (1.55)
LD Pitch: 0.050” (1.27)
Pin Count: 14



SO-16
Width: 0.15” (3.81)
Length: 0.390” (9.90)
Height: 0.061” (1.55)
LD Pitch: 0.050” (1.27)
Pin Count: 16



SO-16WB
Width: 0.295” (7.50)
Length: 0.405” (10.30)
Height: 0.097” (2.46)
LD Pitch: 0.050” (1.27)
Pin Count: 16



SOD-323
Width: 0.051” (1.30)
Length: 0.69” (1.75)
Height: 0.037” (0.94)
LD Pitch: N/A
Pin Count: 2



SOD-723
Width: 0.024” (0.61)
Length: 0.040” (1.02)
Height: 0.022” (0.56)
LD Pitch: N/A
Pin Count: 2



SOD-923
Width: 0.024” (0.60)
Length: 0.031” (0.79)
Height: 0.015” (0.37)
LD Pitch: N/A
Pin Count: 2



SOT-143
Width: 0.051” (1.30)
Length:0.115” (2.92)
Height: 0.039” (1.00)
LD Pitch: 0.075” (1.90)
Pin Count: 4



SOT-23
Width: 0.051” (1.30)
Length:0.115” (2.92)
Height: 0.039” (1.00)
LD Pitch: 0.037” (0.95)
Pad Count: 3

PRODUCT PACKAGING
SCALED 1”-1”
Nominal



SOT-23-6
Width: 0.065” (1.65)
Length:0.115” (2.92)
Height: 0.047” (1.19)
LD Pitch: 0.037” (0.95)
Pin Count: 6



SOT-543
Width: 0.047” (1.19)
Length:0.063” (1.60)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pin Count: 4



SOT-553
Width: 0.047” (1.19)
Length:0.063” (1.60)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pin Count: 5



SOT-563
Width: 0.047” (1.19)
Length:0.063” (1.60)
Height: 0.022” (0.55)
LD Pitch: 0.020” (0.50)
Pin Count: 6



SOT-883
Width: 0.024” (0.50)
Length: 0.039” (1.00)
Height: 0.018” (0.45)
LD Pitch: 0.014”(0.36)
Pad Count: 3



SOT-953
Width: 0.031” (0.79)
Length:0.039” (1.00)
Height: 0.018” (0.46)
LD Pitch: 0.015” (0.38)
Pin Count: 5



SOT-963
Width: 0.031” (0.79)
Length:0.039” (1.00)
Height: 0.018” (0.46)
LD Pitch: 0.015” (0.38)
Pin Count: 6



VSIP-6
Width: 0.250” (6.35)
Length:0.780” (19.18)
Height: 0.130” (3.30)
LD Pitch: 0.100” (2.54)
Pin Count: 6



VSIP-10
Width: 0.250” (6.35)
Length:1.020” (25.90)
Height: 0.110” (2.79)
LD Pitch: 0.100” (2.54)
Pin Count: 10

Not all packages are shown. Please consult factory for all available packages.

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

CONTACT US

Corporate Headquarters
2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone
General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax
General: 602-431-2288

By E-mail:
Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.
8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web
www.protekdevices.com

COPYRIGHT © ProTek Devices 2019 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.

